


| MARKING SCHEME : PHYSICS (042) | | | |
|--------------------------------|---|--|-------------|
| CODE :55/2/3 | | | |
| Q.No | VALUE POINTS/EXPECTED ANSWERS | MARKS | TOTAL MARKS |
| SECTION-A | | | |
| 1. | (D) $\frac{1}{3}$ | 1 | 1 |
| 2. | (A) $\frac{v_d}{2}$ | 1 | 1 |
| 3. | (B) Resistance of the coil | 1 | 1 |
| 4. | (C) $31.4\mu\text{Wb}$ | 1 | 1 |
| 5. | (D) Magnetic Flux and Power both | 1 | 1 |
| 6. | (A) $\frac{5\pi}{6}$ | 1 | 1 |
| 7. | (C) III | 1 | 1 |
| 8. | (B) 8×10^{-28} | 1 | 1 |
| 9. | (C) P | 1 | 1 |
| 10. | (B) $\frac{1}{\lambda_1} + \frac{1}{\lambda_2} = \frac{1}{\lambda_3}$ | 1 | 1 |
| 11. | (B) The barrier height increases and the depletion region widens. | 1 | 1 |
| 12. | (C) $\frac{1}{K}$ | 1 | 1 |
| 13. | (A) Both Assertion(A) and Reason (R) are true and Reason(R) is the correct explanation of the Assertion (A) | 1 | 1 |
| 14. | (C) Assertion(A) is true, but Reason (R) is false | 1 | 1 |
| 15. | (B) Both Assertion(A) and Reason (R) are true but Reason(R) is not the correct explanation of the Assertion (A) | 1 | 1 |
| 16. | (A) Both Assertion(A) and Reason (R) are true and Reason(R) is the correct explanation of the Assertion (A) | 1 | 1 |
| SECTION- B | | | |
| 17. | <div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 0 auto;"> Deriving relation 2 </div> $V = IR$ $El = \frac{I\rho l}{A} \quad (V = El, R = \frac{\rho l}{A})$ $E = \frac{I}{A} \rho$ $E = \sigma\rho$ | $\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$ | 2 |
| 18. | <div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 0 auto;"> Effect on energy gap and justification (i) Trivalent impurity $\frac{1}{2} + \frac{1}{2}$ (ii) Pentavalent impurity $\frac{1}{2} + \frac{1}{2}$ </div> (i) Decreases Justification: An acceptor energy level is formed just above the top of the valence band. | $\frac{1}{2}$ $\frac{1}{2}$ | |

| | | | | | | | | | |
|---------------------------------------|--|---------------------------------------|----------|-------------------------------|-------|---------------------|---|--|--|
| | <p>Alternatively Interference pattern is not formed. (Note : Award full credit of this part if a student merely attempts this part.)</p> <p>(ii) $\beta = \frac{\lambda D}{d}$</p> <p>As d increases, β decreases and fringes disappear.</p> | 1/2 | | | | | | | |
| | | 1/2 | 2 | | | | | | |
| 20. | <table border="1" style="width: 100%;"> <tr> <td style="text-align: left;">Finding ratio of period of revolution</td> <td style="text-align: right;">2</td> </tr> </table> <p>$T = \frac{2\pi r_n}{v_n}$</p> <p>$r_n \propto n^2$</p> <p>$v_n \propto \frac{1}{n}$</p> <p>$T \propto n^3$</p> <p>$\frac{T_2}{T_1} = \frac{(n_2)^3}{(n_1)^3}$</p> <p>$= \frac{(2)^3}{(1)^3}$</p> <p>$= \frac{8}{1}$</p> | Finding ratio of period of revolution | 2 | 1/2 | | | | | |
| Finding ratio of period of revolution | 2 | | | | | | | | |
| | | 1/2 | | | | | | | |
| | | 1/2 | | | | | | | |
| | | 1/2 | 2 | | | | | | |
| 21. | <table border="1" style="width: 100%;"> <tr> <td style="text-align: left;">Finding focal length</td> <td style="text-align: right;">1 1/2</td> </tr> <tr> <td style="text-align: left;">Nature of the lens</td> <td style="text-align: right;">1/2</td> </tr> </table> <p>For convex lens in air</p> <p>$\frac{1}{f_a} = \left(\frac{n_g}{n_a} - 1\right) \left(\frac{1}{R_1} - \frac{1}{R_2}\right)$</p> <p>For convex lens in liquid.</p> <p>$\frac{1}{f_l} = \left(\frac{n_g}{n_l} - 1\right) \left(\frac{1}{R_1} - \frac{1}{R_2}\right)$</p> <p>$\frac{f_l}{f_a} = \frac{1.52 - 1}{1.65 - 1}$</p> <p>$= -6.6$</p> <p>$f_l = -6.6 f_a$</p> <p>$= -99\text{cm}$</p> <p>Nature of the lens: Diverging/ behaves like a concave lens.</p> | Finding focal length | 1 1/2 | Nature of the lens | 1/2 | 1/2 | | | |
| Finding focal length | 1 1/2 | | | | | | | | |
| Nature of the lens | 1/2 | | | | | | | | |
| | | 1/2 | | | | | | | |
| | | 1/2 | | | | | | | |
| | | 1/2 | 2 | | | | | | |
| SECTION- C | | | | | | | | | |
| 22. | <p>(a)</p> <table border="1" style="width: 100%;"> <tr> <td style="text-align: left;">Explaining nature of force</td> <td style="text-align: right;">1/2</td> </tr> <tr> <td style="text-align: left;">Obtaining expression of force</td> <td style="text-align: right;">1 1/2</td> </tr> <tr> <td style="text-align: left;">Defining one ampere</td> <td style="text-align: right;">1</td> </tr> </table> | Explaining nature of force | 1/2 | Obtaining expression of force | 1 1/2 | Defining one ampere | 1 | | |
| Explaining nature of force | 1/2 | | | | | | | | |
| Obtaining expression of force | 1 1/2 | | | | | | | | |
| Defining one ampere | 1 | | | | | | | | |

Nature of force is repulsive.

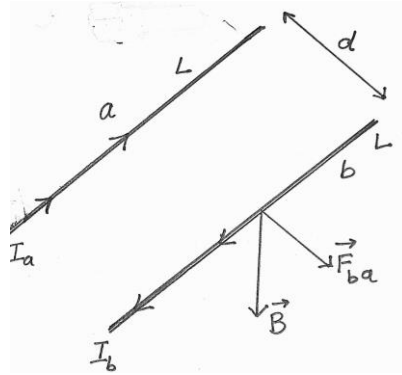

1/2

Magnetic field due to current I_a at all points of conductor b

$$B_{ab} = \frac{\mu_0 I_a}{2\pi d} \quad \text{directed downwards}$$

1/2

Force experienced by conductor b on its segment of length l

$$F_{ab} = I_b B_{ab}$$

$$= \frac{\mu_0 I_a I_b}{2\pi d} l \quad \text{directed towards left}$$

1/2

Similarly

Force experienced by conductor a on its segment of length l



$$F_{ba} = \frac{\mu_0 I_a I_b}{2\pi d} l \quad \text{directed towards right}$$

One ampere is that steady current which when maintained in each of two very long straight parallel conductors of negligible cross-section, placed one metre apart in vacuum produces a force of $2 \times 10^{-7} \text{ N/m}$ on each conductor.

1

OR

| | | |
|-----|--------------------------------|---|
| (b) | Obtaining expression of torque | 2 |
| | Drawing diagram | 1 |

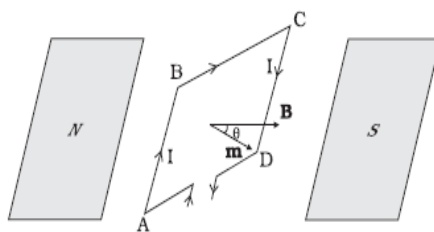

1

Forces on arm BC and DA are equal and opposite and act along the axis of the coil. Being collinear they cancel each other.

1/2


Forces on arms AB and CD are equal and opposite but not collinear. They form a couple.


$$F_1 = F_2 = I b B$$



1/2

$$\tau = F_1 \frac{a}{2} \sin \theta + F_2 \frac{a}{2} \sin \theta$$

1/2
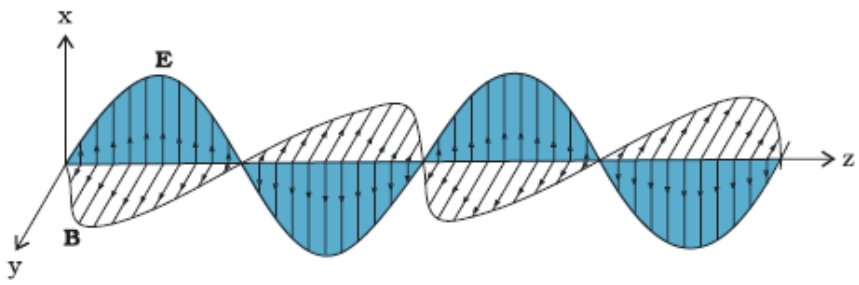
| | | | |
|------------|--|-----------------------------|---------------|
| | $\tau = IabB \sin \theta$ $\tau = IAB \sin \theta$ (where $A = ab$ & $m = IA$) $\vec{\tau} = \vec{m} \times \vec{B}$ | $\frac{1}{2}$ | 3 |
| 23. | <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> (a) Factors affecting speed of Electromagnetic wave 1 (b) Production of Electromagnetic wave 1 (c) Sketch of Electromagnetic wave 1 </div> <p>(a) Speed of EM waves $v = \frac{1}{\sqrt{\mu\epsilon}}$</p> <p>Speed depends upon</p> <p>(i) Permittivity (ϵ) of medium</p> <p>(ii) Magnetic permeability (μ) of medium</p> <p>(b) Accelerated charges or oscillating charges produce electromagnetic waves</p> <p>(c)</p>  | $\frac{1}{2} + \frac{1}{2}$ | 1 |
| 24. | <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> (a) Finding output voltage 1 (b) Finding instantaneous voltage 1 (c) Finding current 1 </div> <p>(a) $V_p(\text{rms}) = \frac{140}{\sqrt{2}} = \frac{140}{1.4} = 100V$</p> <p>$\therefore V_s = \frac{N_s}{N_p} V_p = \frac{1000}{200} 100 = 500V$</p> <p>(b) $v_s = 500\sqrt{2} \sin 100pt = 700 \sin 100pt$</p> <p>(c) Power Output = Power Input</p> <p>$I_s = \frac{5000}{500} = 10A$</p> | $\frac{1}{2}$ | $\frac{1}{2}$ |
| 25. | <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> Finding magnitude and direction of current in AG, BF and CD 1+1+1 </div> | 1 | 3 |
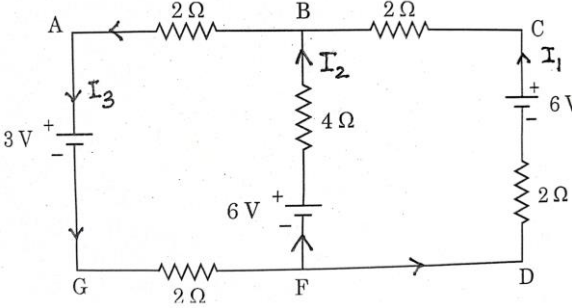
| | | | | | | | | | |
|--|--|--|----------|--|-------|---|----------|--|--|
| |  <p>By Kirchoff's Laws (at point B)</p> $I_1 + I_2 = I_3 \quad \dots\dots(1)$ <p>In the closed loop AGFBA</p> $3 + 2I_3 - 6 + 4I_2 + 2I_3 = 0$ $I_2 + I_3 = \frac{3}{4} \quad \dots\dots(2)$ <p>From (i)</p> $2I_1 + I_2 = \frac{3}{4} \quad \dots\dots(3)$ <p>In closed loop BFDCB</p> $-4I_2 + 6 + 2I_1 - 6 + 2I_1 = 0$ $I_2 - I_1 = 0$ $I_2 = I_1 \quad \dots\dots(4)$ <p>Putting in (3)</p> $I_1 = \frac{1}{4} A$ <p>From (4)</p> $I_2 = \frac{1}{4} A$ <p>From (2) $I_3 = \frac{1}{2} A$</p> | <p>1/2</p> <p>1/2</p> <p>1/2</p> <p>1/2</p> <p>1/2</p> <p>1/2</p> <p>1/2</p> | <p>3</p> | | | | | | |
| <p>26.</p> | <table border="1" data-bbox="321 1192 1230 1285"> <tbody> <tr> <td>(a) Three characteristics</td> <td>1 1/2</td> </tr> <tr> <td>(b) Identifying more stable nucleus and reason</td> <td>1 1/2</td> </tr> </tbody> </table> <p>(a) Characteristics of nuclear forces :-</p> <ol style="list-style-type: none"> 1. Saturated in nature 2. Attractive for distances larger than r_0 and repulsive for distance less than r_0 3. Do not depend on nature of electric charge i.e. same for n-n, n-p and p-p pairs. 4. Much stronger than gravitational forces. <p>(Any three)</p> <p>(b) 8_4X is more stable</p> <p>The ratio of number of neutrons to the number of protons is more in 8_4X than 5_3Y</p> | (a) Three characteristics | 1 1/2 | (b) Identifying more stable nucleus and reason | 1 1/2 | <p>1 1/2</p> <p>1/2</p> | <p>3</p> | | |
| (a) Three characteristics | 1 1/2 | | | | | | | | |
| (b) Identifying more stable nucleus and reason | 1 1/2 | | | | | | | | |
| <p>27.</p> | <table border="1" data-bbox="344 1724 1240 1864"> <tbody> <tr> <td>(a) Drawing schematic arrangement</td> <td>1</td> </tr> <tr> <td>(b) Explaining conclusions</td> <td>1</td> </tr> <tr> <td>(c) Defining distance of closest approach</td> <td>1</td> </tr> </tbody> </table> | (a) Drawing schematic arrangement | 1 | (b) Explaining conclusions | 1 | (c) Defining distance of closest approach | 1 | | |
| (a) Drawing schematic arrangement | 1 | | | | | | | | |
| (b) Explaining conclusions | 1 | | | | | | | | |
| (c) Defining distance of closest approach | 1 | | | | | | | | |
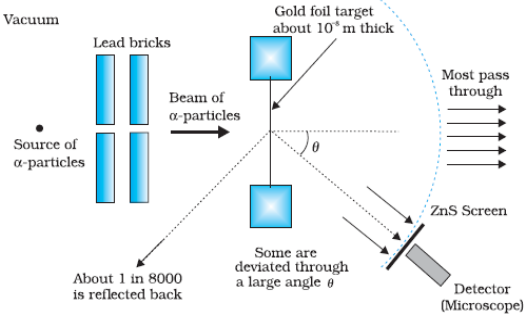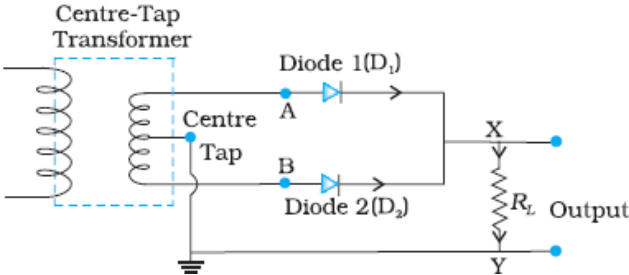
| | | | | | | | |
|---|--|---|----------|-------------------------------------|---|--|--|
| |  <p>(b) -Entire positive charge and most of the mass of atom are concentrated in the nucleus.</p> <ul style="list-style-type: none"> - Electrons move in orbits about the nucleus just as planets around the sun. - Size of nucleus is about 10^{-15} m to 10^{-14} m. - Most of the space in an atom is empty. <p>(c) The distance of the α particle from the centre of nucleus at which the whole of the initial kinetic energy of the particle gets converted into the electric potential energy.</p> <p>Alternatively The distance of the α particle from the centre of nucleus at which it stops momentarily and reverses its direction.</p> | <p>1</p> <p>1</p> <p>1</p> | <p>3</p> | | | | |
| <p>28.</p> | <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px 5px;">Explaining working of full wave rectifier</td> <td style="text-align: right; padding: 2px 5px;">2</td> </tr> <tr> <td style="padding: 2px 5px;">Drawing input and output wave forms</td> <td style="text-align: right; padding: 2px 5px;">1</td> </tr> </table> </div>  <p>When input voltage at A with respect to the centre tap at any instant is positive, at that instant voltage at B, being out of phase will be negative, during the positive half cycle diode D_1 gets forward biased and conducts while diode D_2 gets reverse biased and does not conduct. Hence during positive half cycle an output current and output voltage across R_L is obtained.</p> <p>During second half of the cycle when voltage at A becomes negative with respect to centre tap, the voltage at B would be positive hence D_1 would not conduct but D_2 would be giving an output current and output voltage. We get output voltage in both positive and negative half cycles.</p> | Explaining working of full wave rectifier | 2 | Drawing input and output wave forms | 1 | <p>1</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> | |
| Explaining working of full wave rectifier | 2 | | | | | | |
| Drawing input and output wave forms | 1 | | | | | | |

$$\phi = \frac{2\pi\Delta}{\lambda}$$

$$\phi = 2\pi$$

$$I = 4I_0 \cos^2 \frac{\phi}{2}$$

$$K = 4I_0 \cos^2 \pi = 4I_0$$

$$\text{Path difference} = \frac{\lambda}{6}$$

$$\phi = \pi / 3$$

$$I = 4I_0 \cos^2 \frac{\pi}{6}$$

$$= 4I_0 \times \frac{3}{4}$$

$$= \frac{3}{4} K$$

1/2

1/2

1/2


1/2

OR

(b)

| | |
|---------------------------------|---|
| (i) Drawing labeled ray diagram | 1 |
| Derivation of magnifying power | 2 |
| (iii) Finding magnifying power | 2 |

(i)

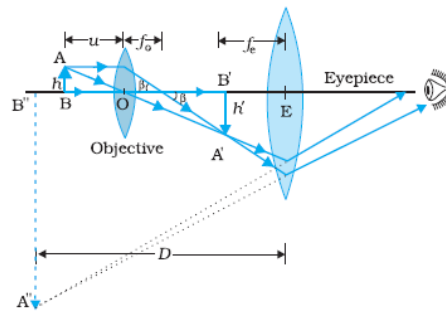

1

The magnification obtained by eye-piece lens $m_e = \left(1 + \frac{D}{f_e}\right)$

1/2

The magnification obtained by objective lens $m_o = \frac{v_0}{-u_0}$

1/2

Hence the total magnifying power is

$$m = m_o \times m_e$$

1/2

$$= \frac{v_0}{-u_0} \left(1 + \frac{D}{f_e}\right)$$

1/2

$$(ii) m = \left| \frac{f_o}{f_e} \right|$$

1

Identification of focal length of objective and eyepiece

$$f_o = 100\text{cm}$$

$$f_e = 5\text{cm}$$

1/2

$$m = \left| \frac{100}{5} \right| = 20$$


1/2

5

32.

| | | |
|-----|---|---|
| (a) | (i) Obtaining expression for electric potential | 3 |
| | (ii) Finding the value of n | 2 |

(i)

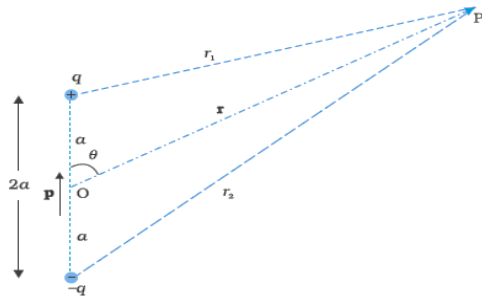

1/2

Potential due to the dipole is the sum of potentials due to charges q and -q

$$V = \frac{1}{4\pi\epsilon_0} \left(\frac{q}{r_1} - \frac{q}{r_2} \right) \text{-----(1)}$$

1/2

By geometry

$$r_1^2 = r^2 + a^2 - 2ar \cos \theta$$

$$r_2^2 = r^2 + a^2 + 2ar \cos \theta$$

1/2

For $r \gg a$, retaining terms only up to first order in a/r

$$r_1^2 = r^2 \left(1 - \frac{2a \cos \theta}{r} + \frac{a^2}{r^2} \right)$$

$$\cong r^2 \left(1 - \frac{2a \cos \theta}{r} \right)$$

Similarly

$$r_2^2 \cong r^2 \left(1 + \frac{2a \cos \theta}{r} \right)$$

1/2

Using the binomial theorem and retaining terms up to the first order in a/r

$$\frac{1}{r_1} \cong \frac{1}{r} \left(1 - \frac{2a \cos \theta}{r} \right)^{-1/2}$$

$$\cong \frac{1}{r} \left(1 + \frac{a \cos \theta}{r} \right) \text{-----(2)}$$

$$\frac{1}{r_2} \cong \frac{1}{r} \left(1 + \frac{2a \cos \theta}{r} \right)^{-1/2} \text{-----(3)}$$

$$\cong \frac{1}{r} \left(1 - \frac{a \cos \theta}{r} \right)$$

1/2


Using eqn. (1) (2), (3) and $p = 2qa$

$$V = \frac{q}{4\pi\epsilon_0} \frac{2a \cos \theta}{r^2}$$

$$= \frac{p \cos \theta}{4\pi\epsilon_0 r^2}$$


1/2

Alternatively –

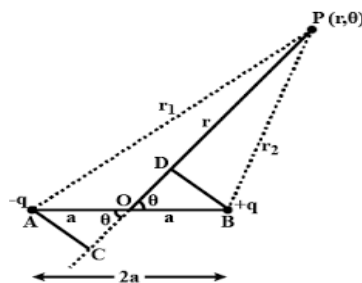

1/2

| | | | | | | | | |
|--|----------------------------------|---|---|---|------------------------------------|---|--|--|
| $r_2 = r + a \cos \theta$ $r_1 = r - a \cos \theta$ $V = \frac{q}{4\pi\epsilon_0} \left(\frac{1}{r_1} - \frac{1}{r_2} \right)$ $V = \frac{q}{4\pi\epsilon_0} \left(\frac{1}{r - a \cos \theta} - \frac{1}{r + a \cos \theta} \right)$ $= \frac{q}{4\pi\epsilon_0} \left(\frac{2a \cos \theta}{r^2 - a^2 \cos^2 \theta} \right)$ $= \frac{p}{4\pi\epsilon_0 r^2} \left(\frac{\cos \theta}{1 - \frac{a^2}{r^2} \cos^2 \theta} \right)$ | 1/2 | | | | | | | |
| <p>For $r \gg a$, neglecting $\frac{a^2}{r^2}$</p> $V = \frac{p \cos \theta}{4\pi\epsilon_0 r^2}$ | 1/2 | | | | | | | |
| <p>(ii) Consider the side of equilateral triangle as 'a'</p> <p>Potential energy = $U = \frac{kq_1q_2}{a} + \frac{kq_2q_3}{a} + \frac{kq_1q_3}{a}$</p> | 1/2 | | | | | | | |
| <p>According to question</p> $U = \frac{k(q)(2q)}{a} + \frac{k(2q)(nq)}{a} + \frac{k(q)(nq)}{a} = 0$ $= \frac{2q^2}{a} + \frac{2nq^2}{a} + \frac{nq^2}{a} = 0$ $2 + 2n + n = 0$ $3n = -2$ $n = -\frac{2}{3}$ | 1/2 | | | | | | | |
| OR | | | | | | | | |
| <table border="1" style="width: 100%;"> <tbody> <tr> <td>(b) (i) Statement of Gauss's Law</td> <td style="text-align: right;">1</td> </tr> <tr> <td> Obtaining expression for electric field</td> <td style="text-align: right;">2</td> </tr> <tr> <td>(ii) Finding net force on electron</td> <td style="text-align: right;">2</td> </tr> </tbody> </table> | (b) (i) Statement of Gauss's Law | 1 | Obtaining expression for electric field | 2 | (ii) Finding net force on electron | 2 | | |
| (b) (i) Statement of Gauss's Law | 1 | | | | | | | |
| Obtaining expression for electric field | 2 | | | | | | | |
| (ii) Finding net force on electron | 2 | | | | | | | |
| <p>(i) Electric Flux through a closed surface is equal to $\frac{q}{\epsilon_0}$, where q is the total charge enclosed by the surface. $\phi = \frac{q}{\epsilon_0}$</p> <p>Alternatively</p> <p>The surface integral of electric field over a closed surface is $\frac{1}{\epsilon_0}$ times the total charge enclosed by the surface.</p> $\oint \vec{E} \cdot d\vec{S} = \frac{q}{\epsilon_0}$ <p>(Award 1/2 mark for writing the formula only.)</p> | 1 | | | | | | | |

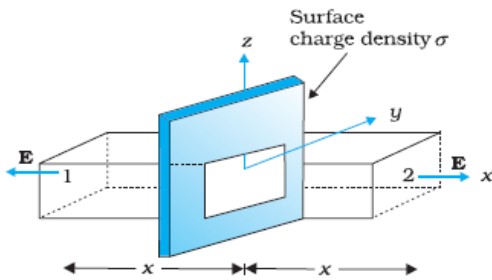

(Gaussian surface can be cylindrical also)

As seen from figure, only two faces 1 and 2 will contribute to the flux.

Flux $\vec{E} \cdot d\vec{s}$ through both the surfaces is equal and add up.

The charge enclosed by surface is σA , where σ is surface charge density

According to Gauss's theorem

$$2EA = \sigma A / \epsilon_0$$

$$E = \sigma / 2\epsilon_0$$

$$\vec{E} = \frac{\sigma}{2\epsilon_0} \hat{n} \quad \text{where } \hat{n} \text{ is unit vector directed normally out of the plane}$$

$$(ii) \vec{E} = \frac{\lambda}{2\pi\epsilon_0 r} \hat{r}$$

According to question

$$E_1 \text{ (at point P)} = \frac{\lambda_1}{2\pi\epsilon_0 r_1}$$

$$= \frac{10 \times 10^{-6}}{2\pi\epsilon_0 (10 \times 10^{-2})} (-\hat{j}) \text{ N/C}$$

$$E_2 \text{ (at point P)} = \frac{\lambda_2}{2\pi\epsilon_0 r_2}$$

$$= \frac{20 \times 10^{-6}}{2\pi\epsilon_0 (20 \times 10^{-2})} (-\hat{j}) \text{ N/C}$$

$$E_{net} = \frac{10 \times 10^{-6}}{2\pi\epsilon_0} \left(\frac{1}{0.1} + \frac{2}{0.2} \right) (-\hat{j}) \text{ N/C}$$

$$= 3.6 \times 10^6 (-\hat{j}) \text{ N/C}$$

$$F_{net} = q \times E_{net}$$

$$= -1.6 \times 10^{-19} \times 3.6 \times 10^6 (-\hat{j}) \text{ N}$$

$$= 5.76 \times 10^{-13} \text{ N } (\hat{j})$$

1/2

1/2

1/2

1/2

1/2

1/2

1/2


1/2

5

33.

(a)

| | |
|--|-------|
| (i) Showing helical path | 1 1/2 |
| Obtaining frequency of revolution | 1 1/2 |
| (ii) Finding magnetic moment of electron | 2 |

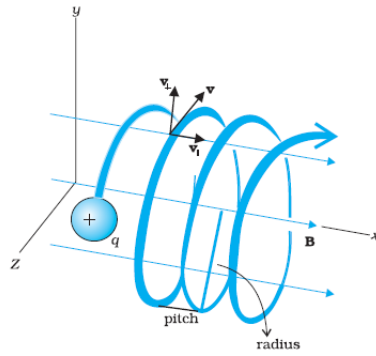

1/2

$v_{\perp} = v \sin \theta$ is perpendicular to \vec{B} and

$v_{\parallel} = v \cos \theta$ is parallel to \vec{B}

Due to v_{\perp} the charge describes circular path and v_{\parallel} pushes it in the direction of \vec{B} . Therefore under the combined effect of two components the charged particle describes helical path, as shown in the figure.

1

The centripetal force

$$\frac{mv_{\perp}^2}{r} = Bqv_{\perp}$$

1/2

$$v_{\perp} = \frac{Bqr}{m} \quad (v_{\perp} = v \sin \theta)$$

1/2

$$\begin{aligned} \text{Time period} = T &= \frac{2\pi r}{v_{\perp}} \\ &= \frac{2\pi m}{Bq} \end{aligned}$$

$$\text{frequency } \nu = \frac{1}{T} = \frac{Bq}{2\pi m}$$

1/2

(ii) Magnetic moment $m = IA$

$$I = \frac{e}{T} = ev$$

1/2

$$= 1.6 \times 10^{-19} \times 8 \times 10^{14}$$

$$= 1.28 \times 10^{-4} \text{ A}$$

1/2

$$M = 1.28 \times 10^{-4} \times 3.14 \times (2 \times 10^{-10})^2$$

1/2

$$= 5.12\pi \times 10^{-24} \text{ Am}^2 = 1.6 \times 10^{-23} \text{ Am}^2$$

1/2

OR

(b)

| | |
|---|-----|
| (i) Definition of current sensitivity | 1 |
| Showing dependence of current sensitivity & explanation | 1+1 |
| (ii) Calculation of resistance | 2 |

(i) Deflection produced per unit current is called its current sensitivity.

1

$$I_s = \frac{\theta}{I} = \frac{NBA}{K}$$

Current sensitivity can be increased by

(a) increasing number of turns in coil

| | | |
|--|---|-----------------|
| <p>(b) increasing area of coil in magnetic field (c) decreasing K (Torsional Constant) (any one) $V_s = \frac{\theta}{V} = \frac{NBA}{KR}$ <p>If current sensitivity is increased by increasing number of turns of the coil, the resistance of the galvanometer will also increase. Thus voltage sensitivity may not increase.</p> <p>(ii) $V = I_G(R + G)$ $R = \frac{V}{I_G} - G$ $= \frac{100}{20 \times 10^{-3}} - 15$ $= 5000 - 15$ $= 4985\Omega$ <p>By connecting 4985Ω in series with galvanometer it is converted to voltmeter of range (0-100V)</p> </p></p> | <p>1</p> <p>1</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> | <p>5</p> |
|--|---|-----------------|