
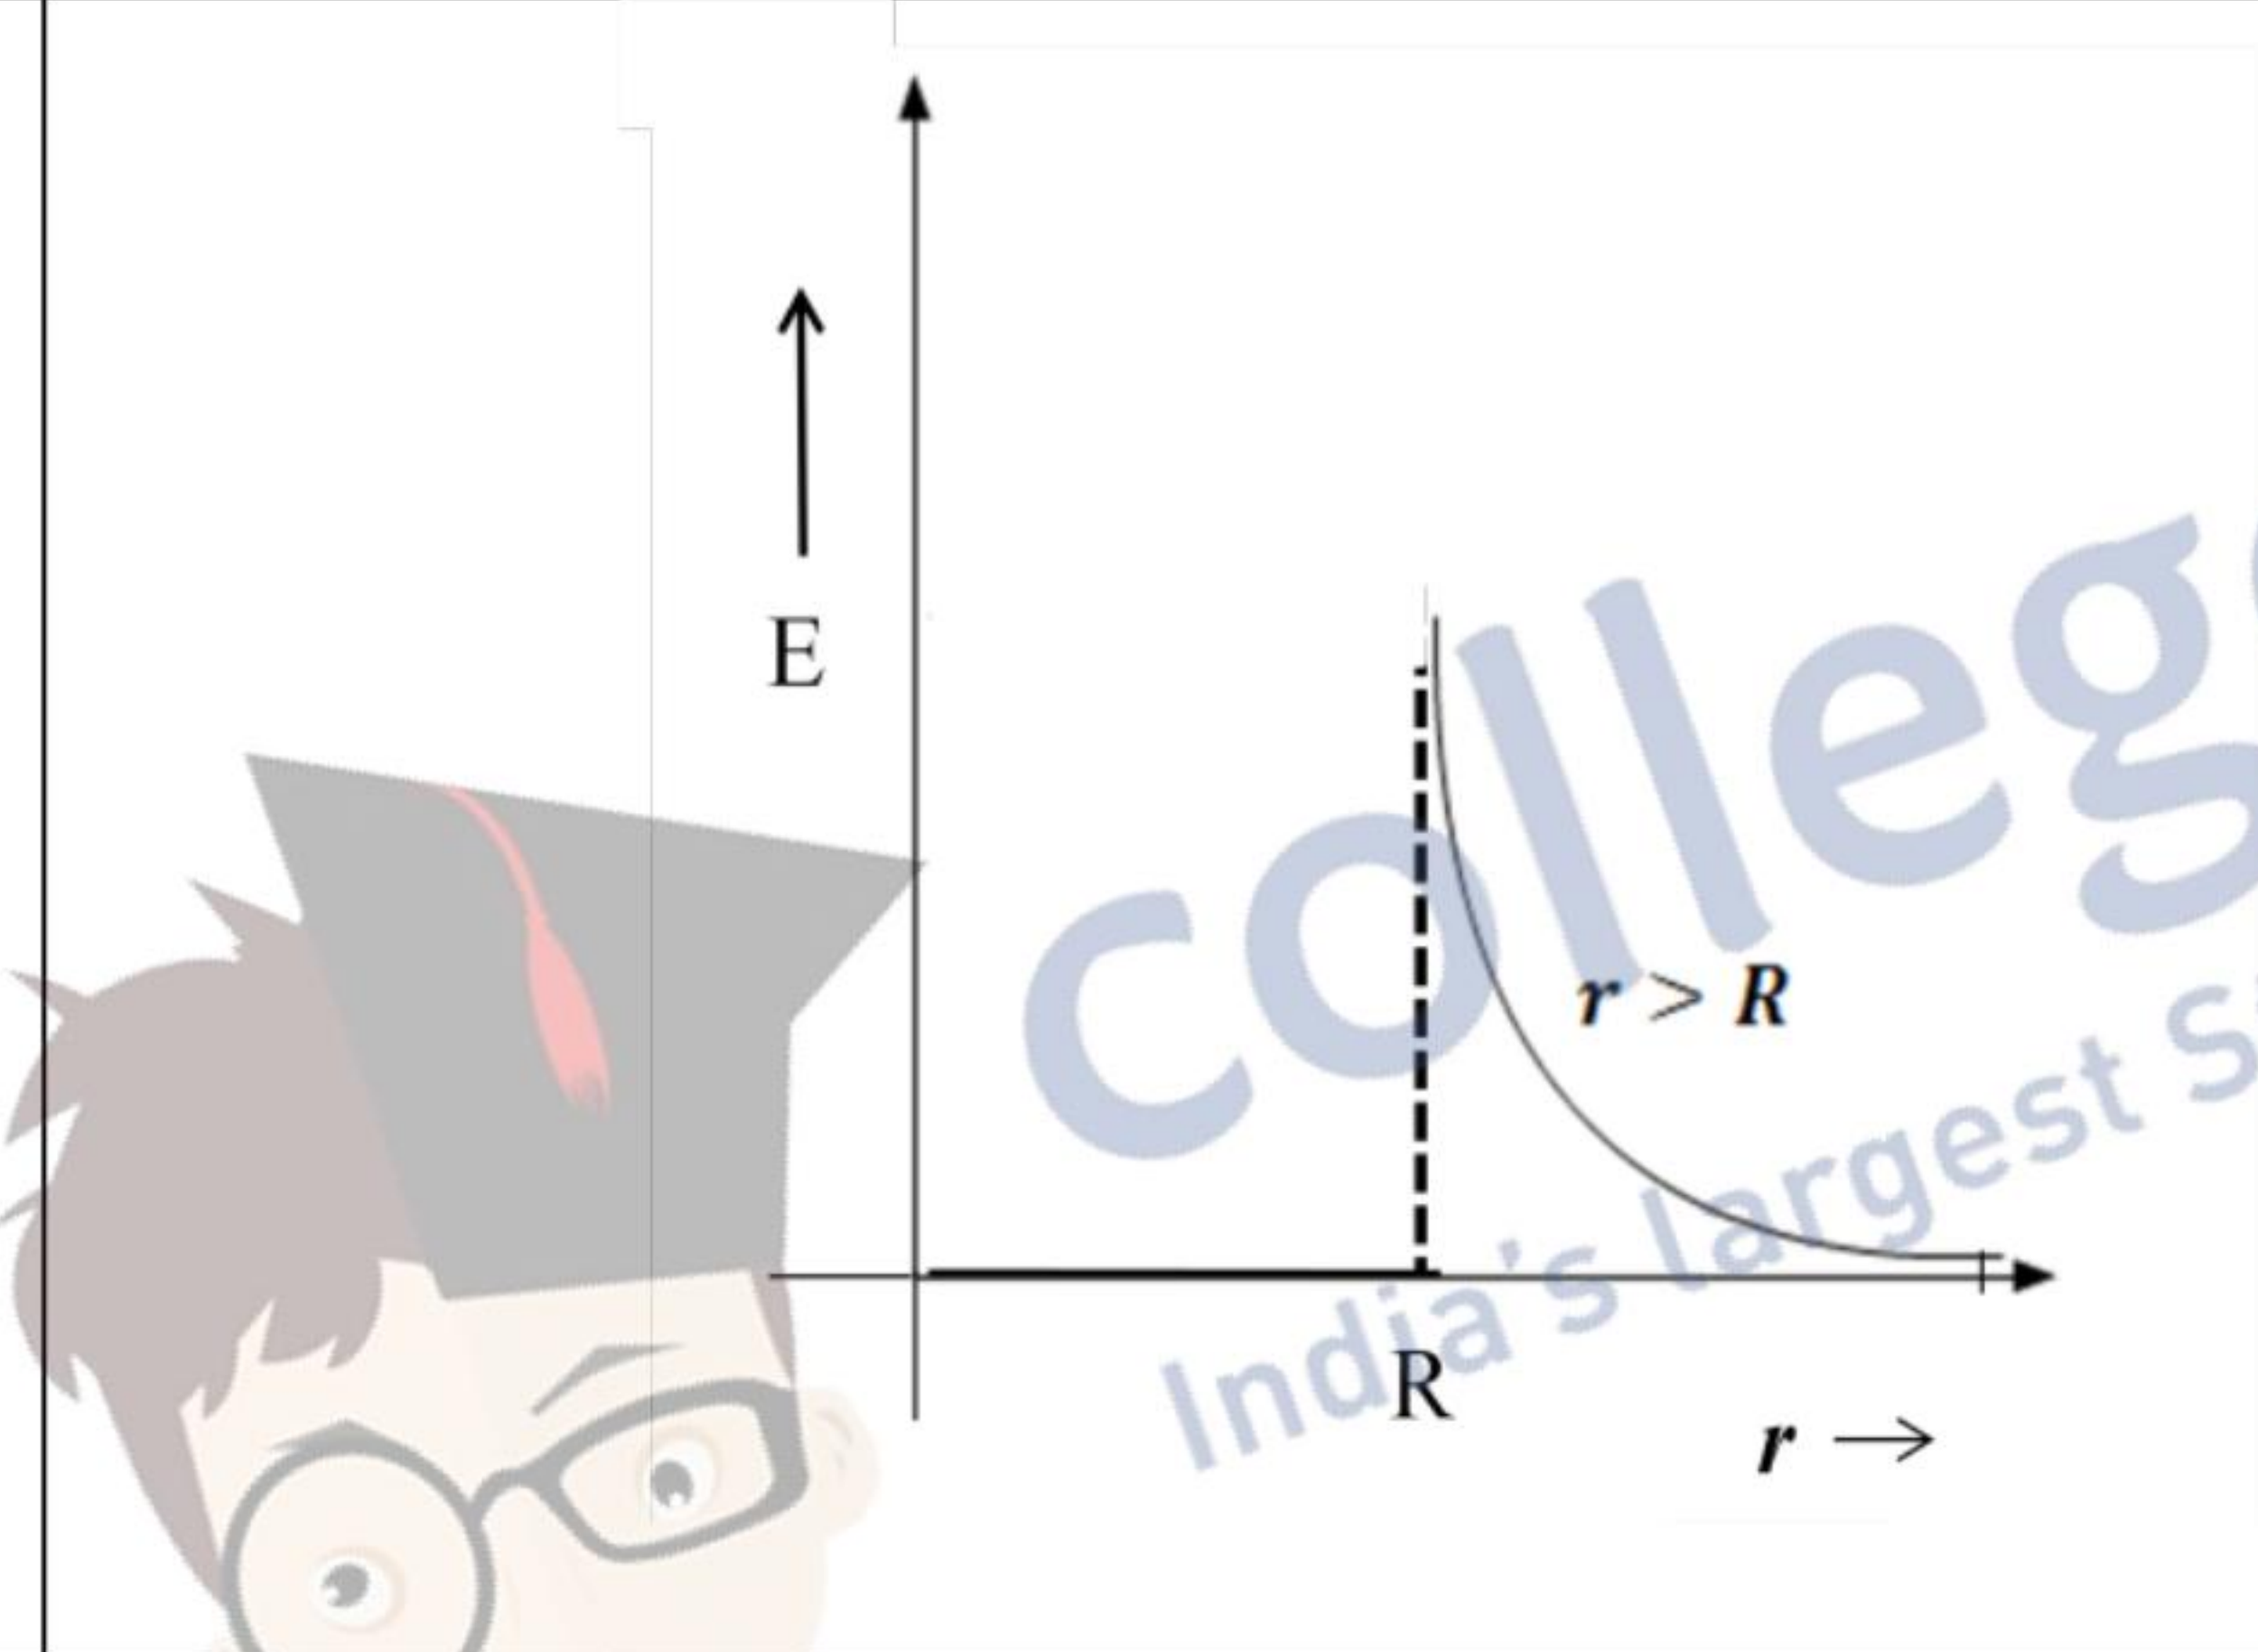


MARKING SCHEME

Q. No.	Expected Answer/ Value Points	Marks	Total Marks
SECTION A			
Q1	No	1	1
Q2	Virtual/ erect/ diminished	1/2+1/2	1
Q3	Relative permeability $\mu_r = \frac{L}{L_0} = \frac{2.8}{2.0 \times 10^{-3}}$ $= 1400$	1/2 1/2	1
Q4	It does not affect the stopping potential.	1	1
Q5		1	1
SECTION B			
Q6	<div style="border: 1px solid black; padding: 5px; display: inline-block;"> Derivation of the expression for radius 2 </div> <p>Force experienced by charged particle in magnetic field $\vec{F} = q (\vec{v} \times \vec{B})$ As v and B are perpendicular, $F = qvB$ This force is perpendicular to the direction of velocity and hence acts as centripetal force.</p> $\frac{mv^2}{r} = qvB$ $r = \frac{mv}{qB}$	1/2 1/2 1/2 1/2	2

Q7

Derivation of the expression of the diameter of
opaque disc 2

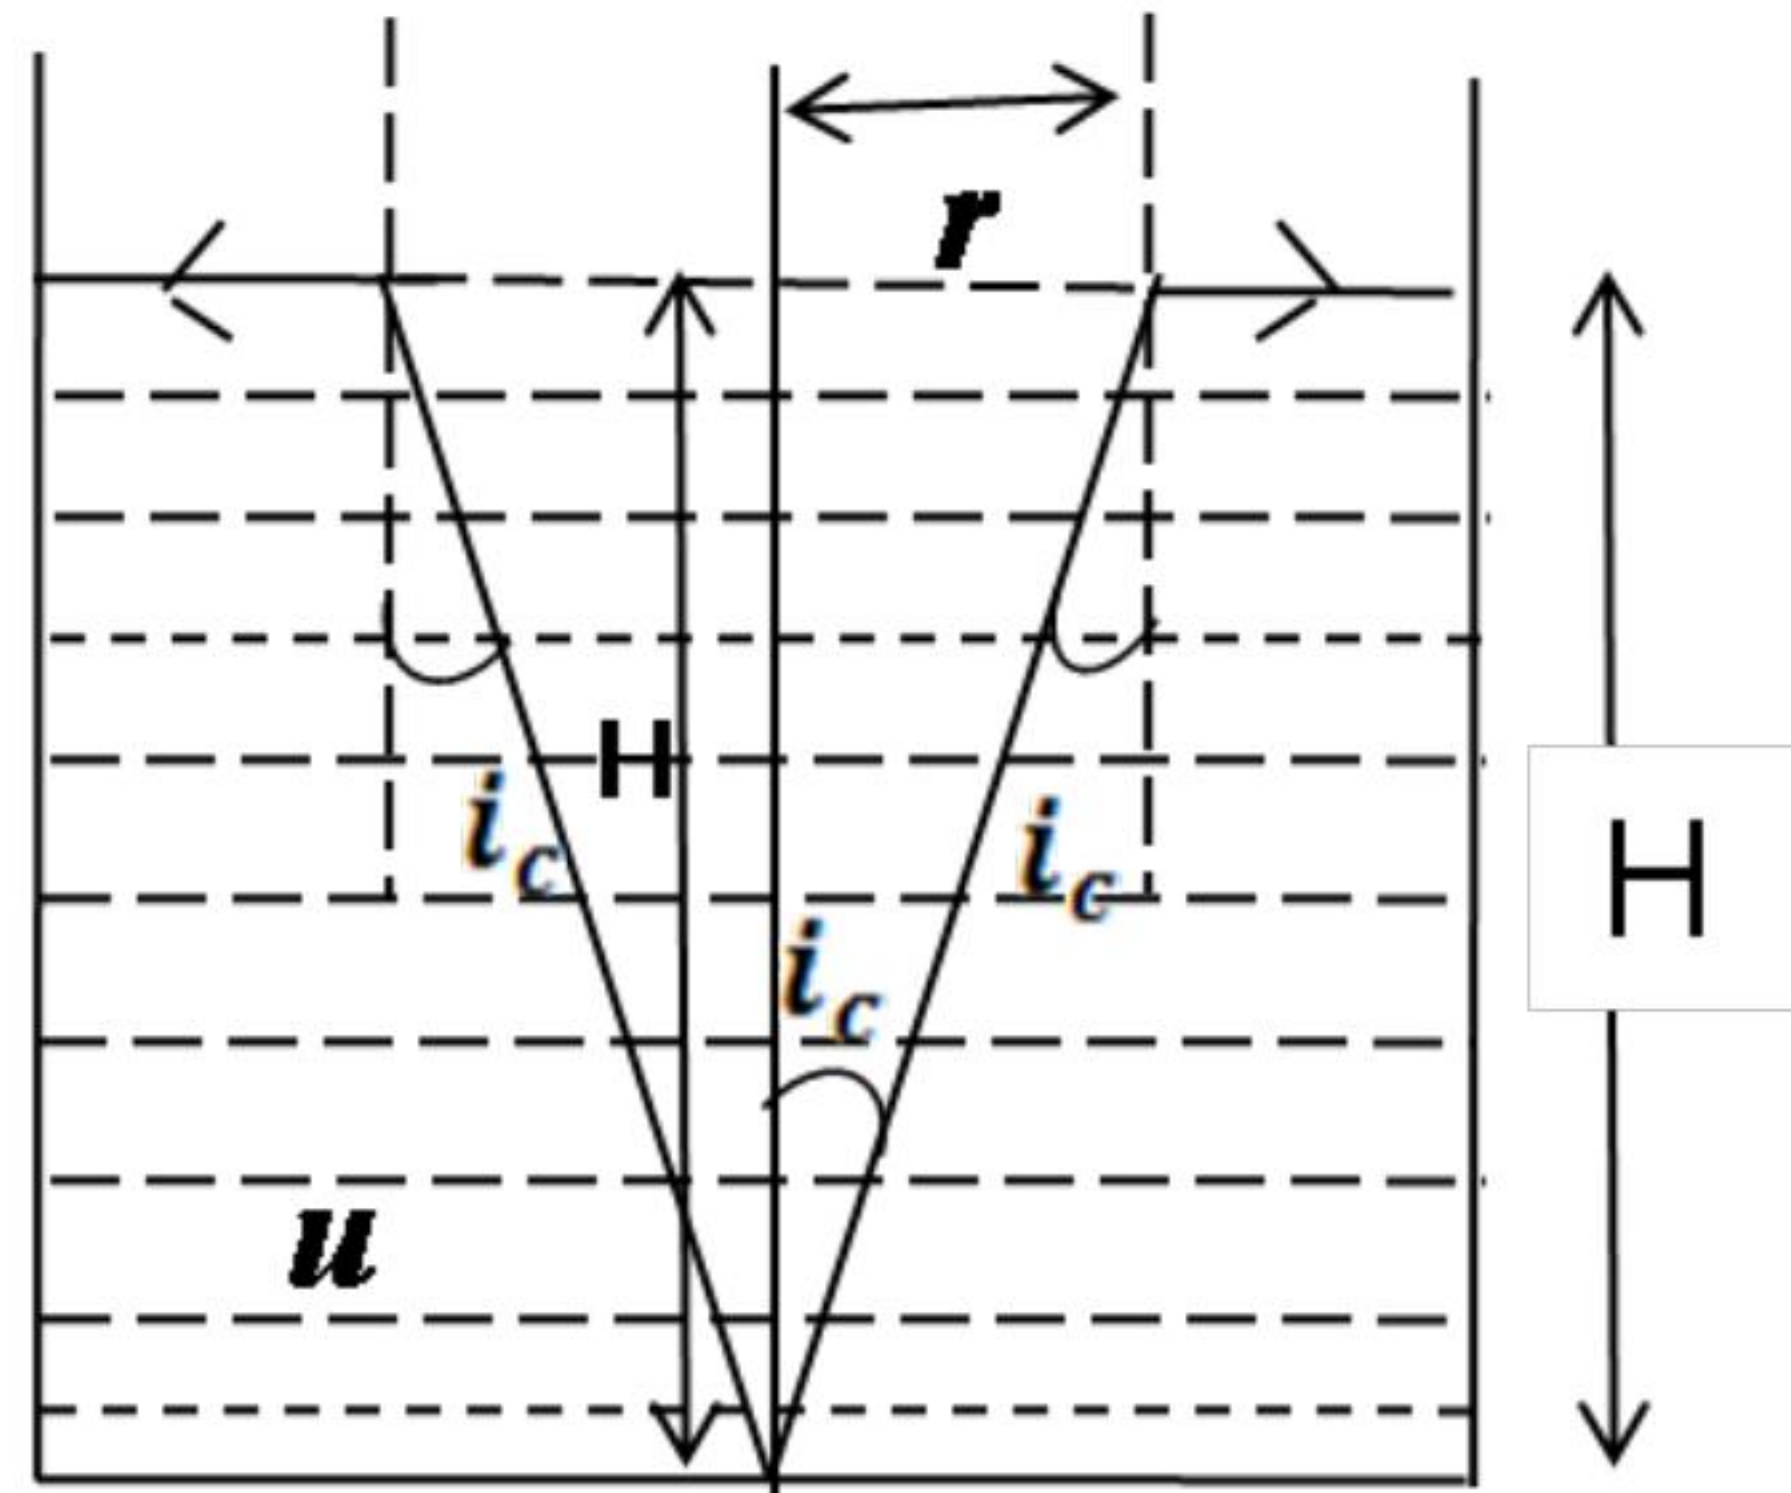

It is only the light coming out from a cone of semi vertical angle i_c ($i_c = \sin^{-1} \frac{1}{\mu}$ = critical angle) that needs to be stopped by the opaque disc

Now $\sin i_c = \frac{1}{\mu}$
 $\therefore \cos i_c = \sqrt{1 - \frac{1}{\mu^2}}$

Also $\tan i_c = \frac{r}{H}$
 $\Rightarrow r = H \tan i_c = H \frac{\sin i_c}{\cos i_c}$

$$= H \cdot \frac{\frac{1}{\mu}}{\sqrt{1 - \frac{1}{\mu^2}}}$$

$$r = \frac{H}{\sqrt{\mu^2 - 1}}$$

Diameter of the opaque disc = $2r$


$$= \frac{2H}{\sqrt{\mu^2 - 1}}$$




OR


 $\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$

2

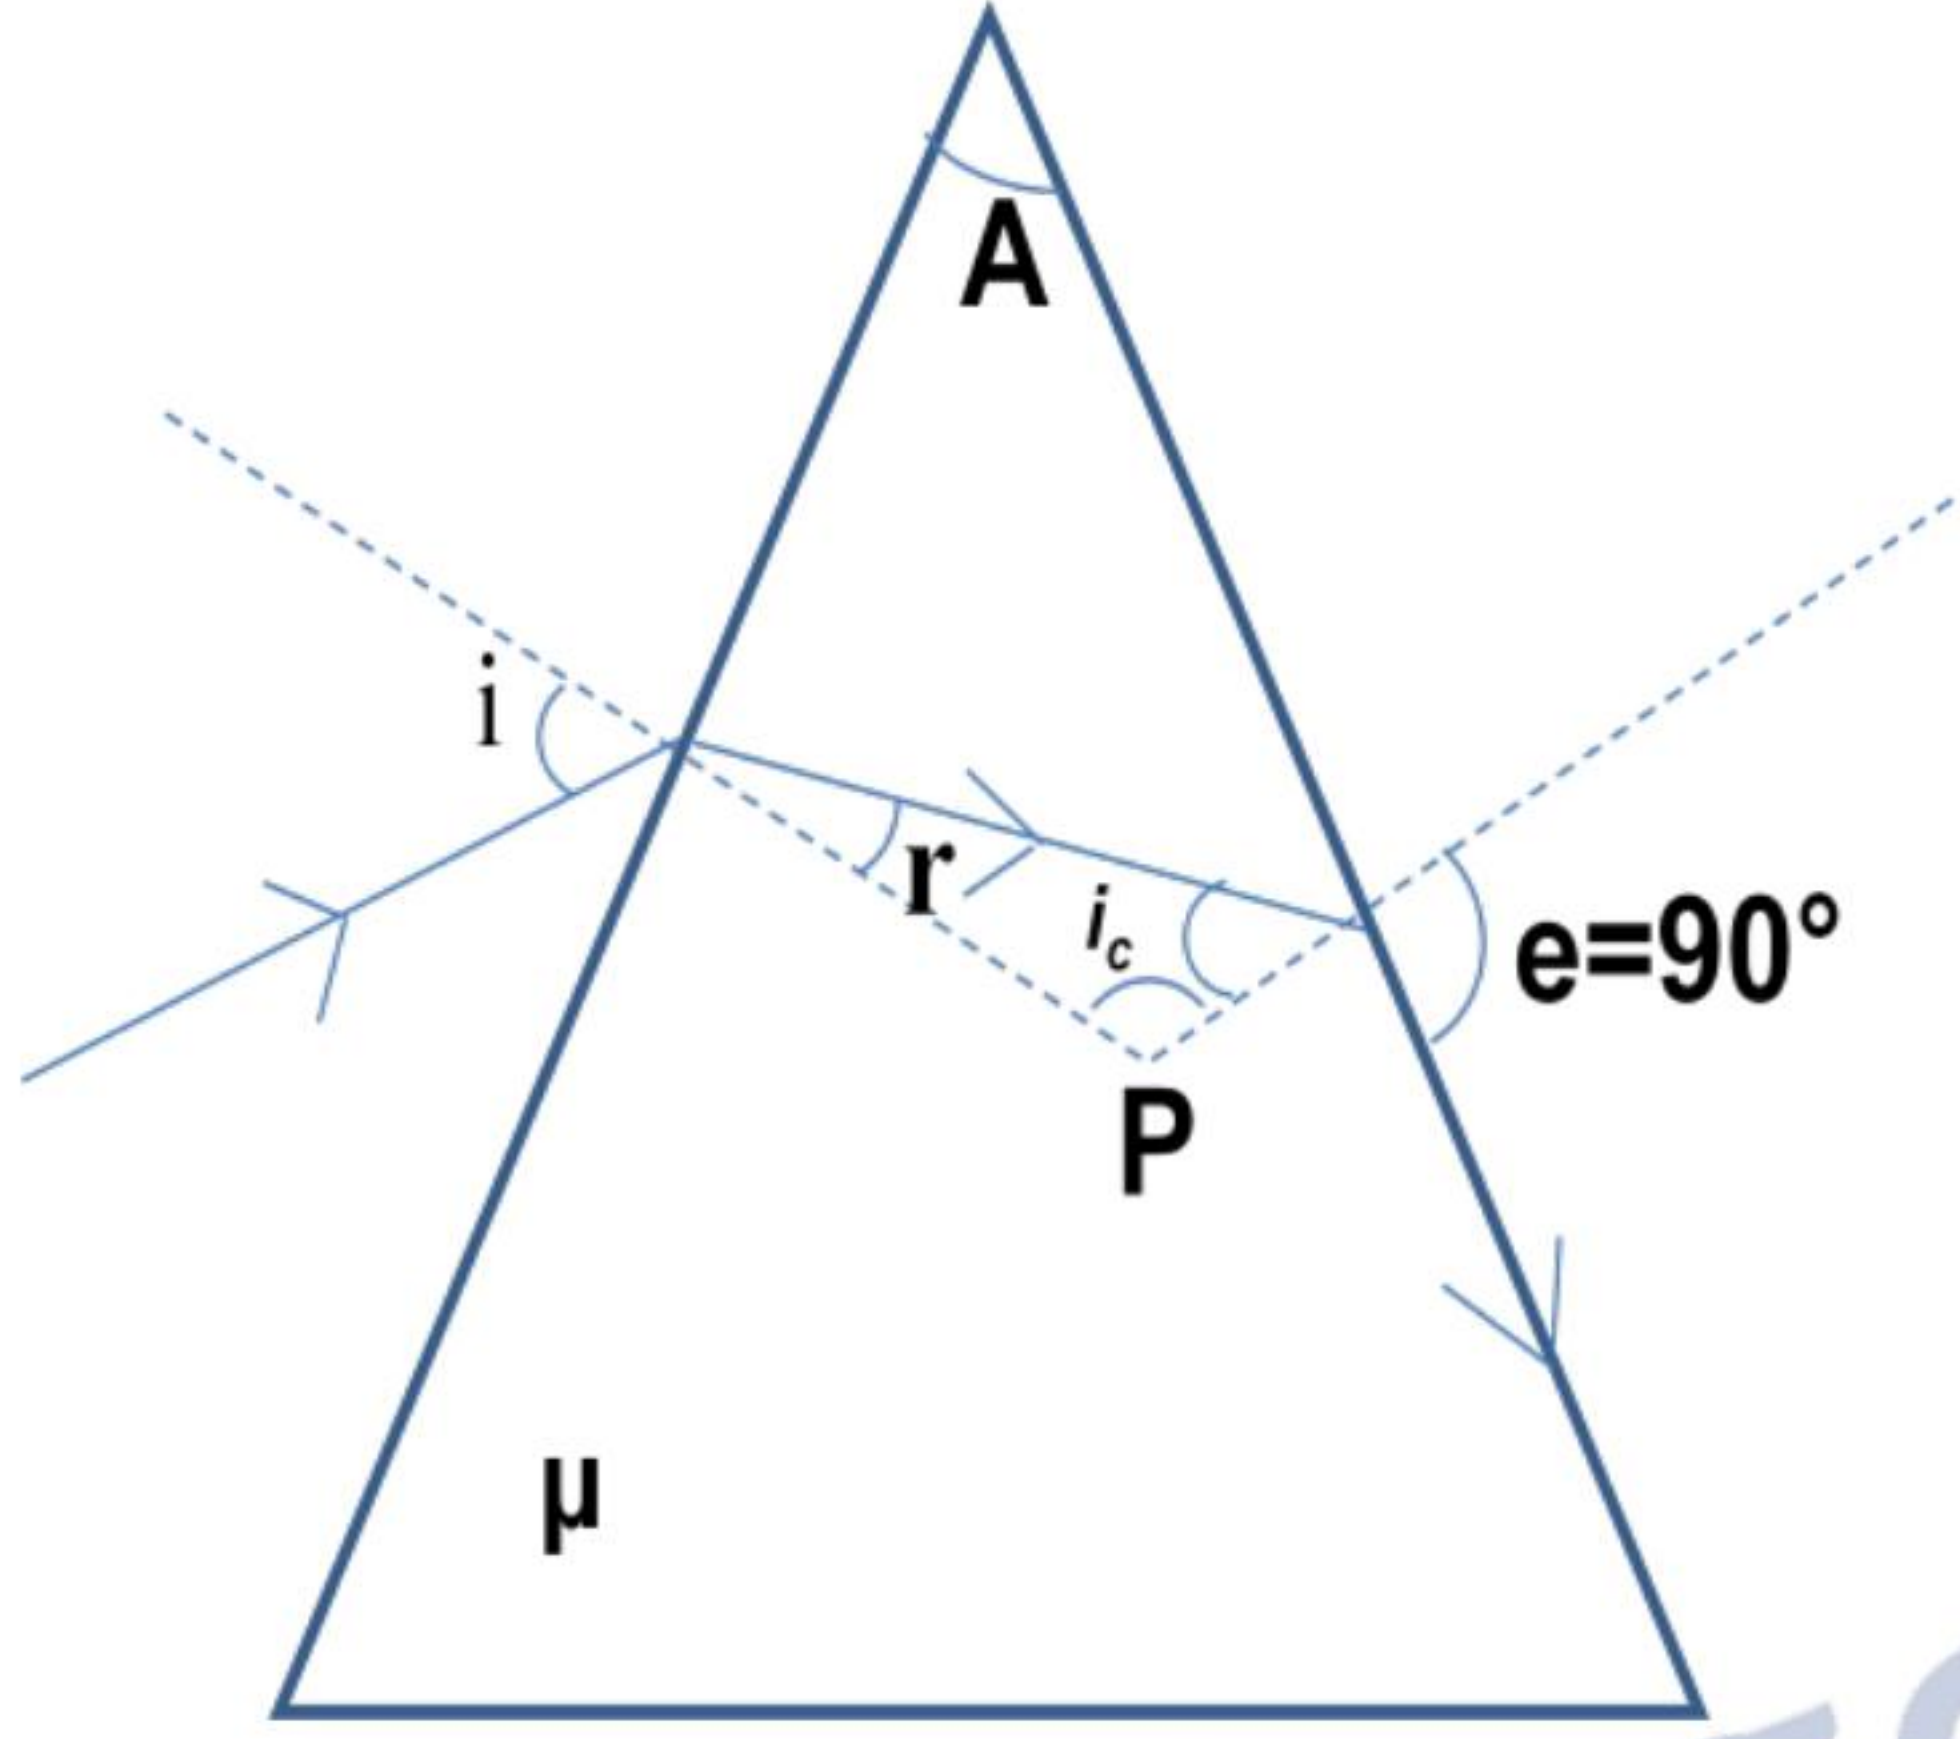


	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>Obtaining an expression relating angle of incidence, angle of prism and critical angle. 2</p> </div> <div style="text-align: center;">  </div> <div style="margin-top: 20px;"> $\mu = \frac{\sin i}{\sin r}$ <p>and $\frac{1}{\mu} = \frac{\sin r}{\sin i_c} = \sin i_c$</p> $\angle A + \angle P = 180$ <p>and $\angle r + \angle i_c = 180 - \angle P$</p> $= \angle A$ $\Rightarrow \angle r = \angle A - \angle i_c$ $\Rightarrow \mu = \frac{\sin i}{\sin(A - i_c)}$ $\frac{1}{\sin i_c} = \frac{\sin i}{\sin(A - i_c)}$ </div>	<p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p>	<p>2</p>
<p>Q8</p>	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>Production of e m waves 1</p> <p>Diagram depicting the oscillating electric and magnetic fields. 1</p> </div> <p>Electromagnetic waves are produced due to oscillating/ accelerating charged particles.</p>	<p>1</p>	

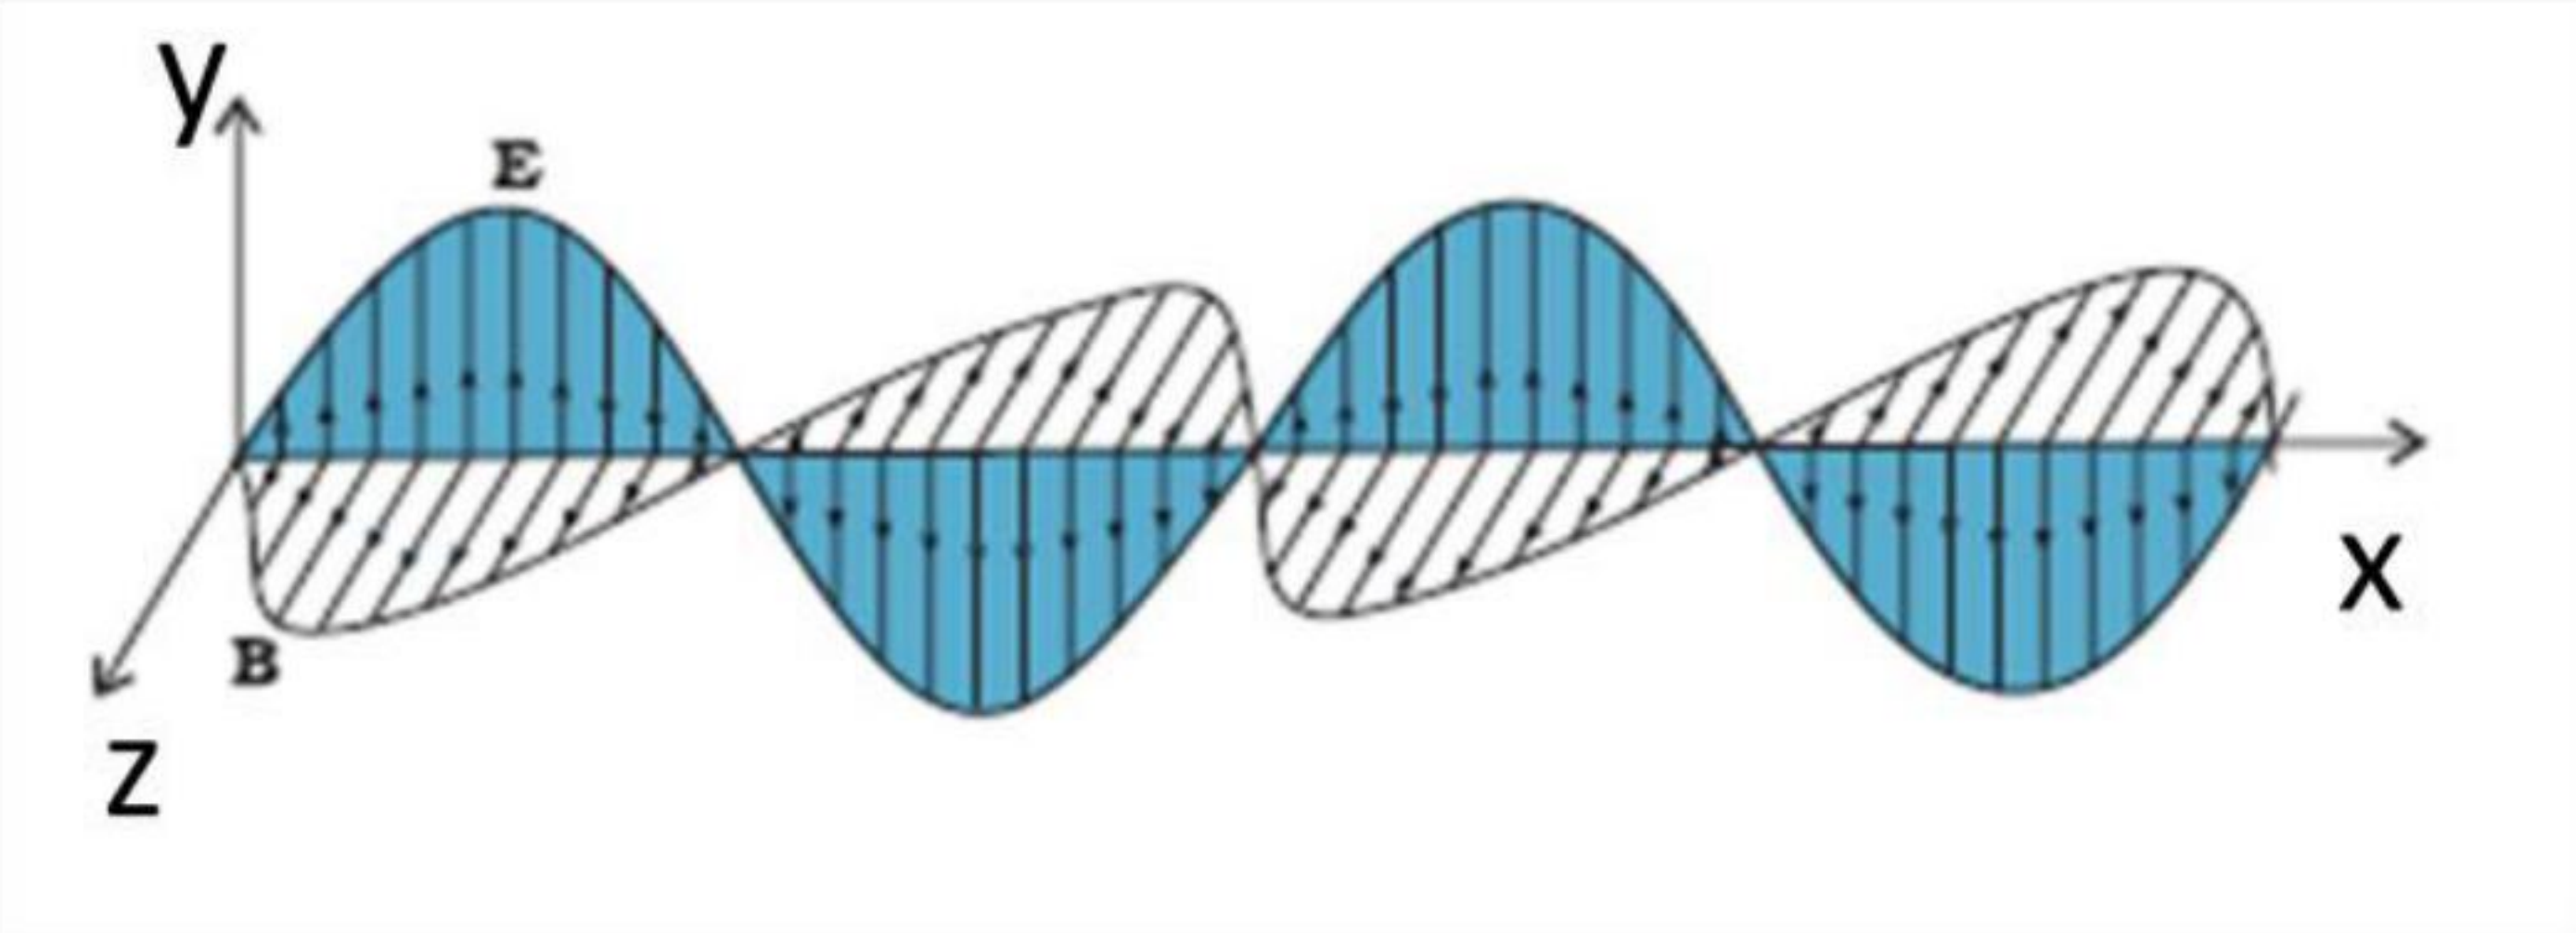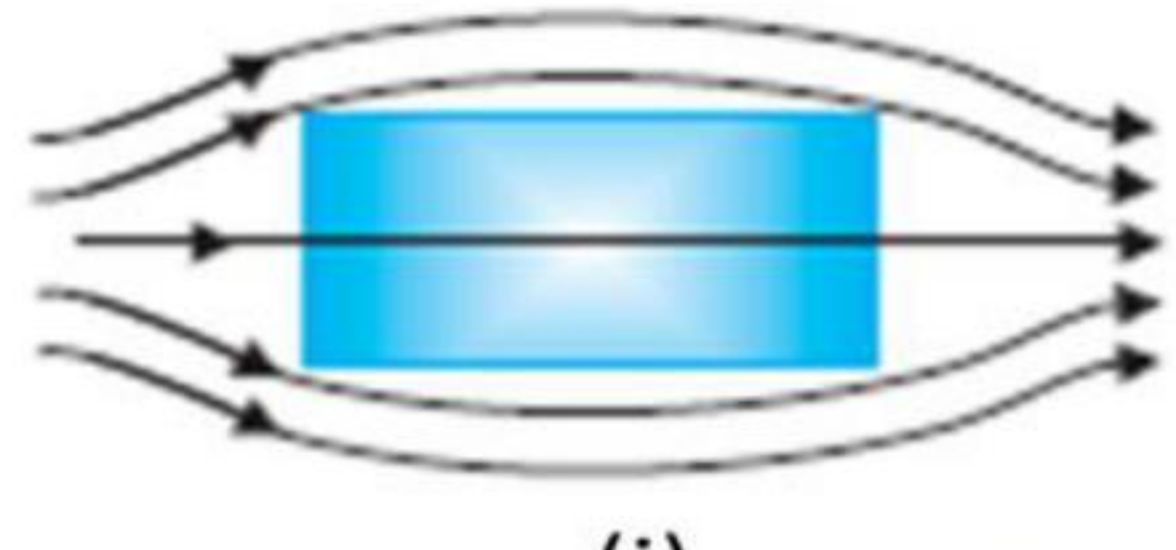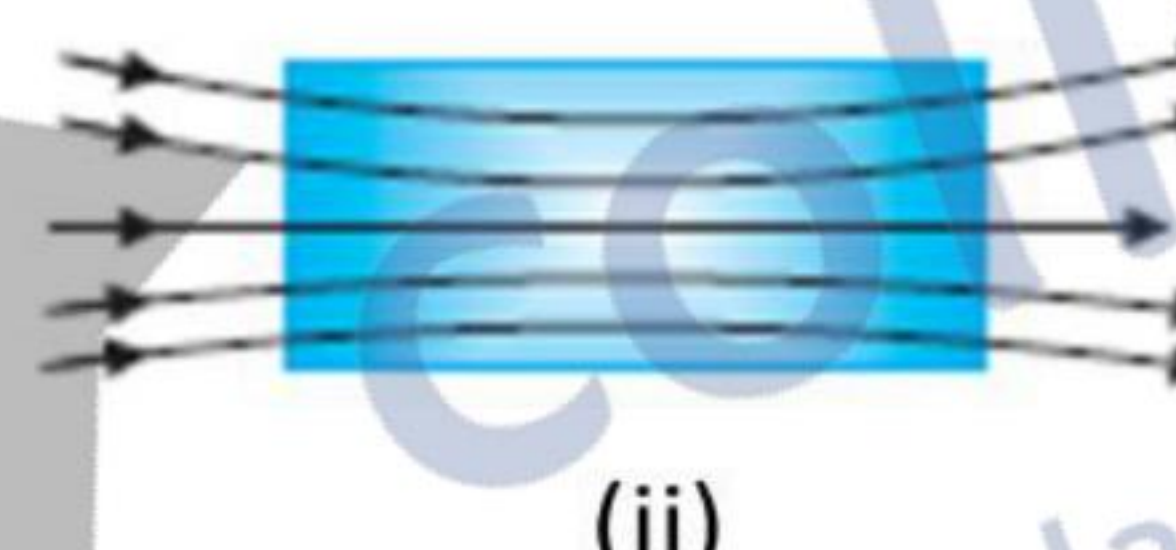
		1	2									
Q9	<p>Depiction of behaviour</p> <table border="1" data-bbox="483 786 1402 1053"> <tr> <td>(i)</td> <td>Diamagnetic</td> <td>1/2</td> </tr> <tr> <td></td> <td>Paramagnetic</td> <td>1/2</td> </tr> <tr> <td>(ii)</td> <td>Their justification</td> <td>1/2 + 1/2</td> </tr> </table> <div style="text-align: center;">  <p>(i)</p>  <p>(ii)</p> </div> <p>The Field lines are repelled or expelled and the field inside the material is reduced.</p> <p>In the presence of magnetic field, the individual atomic dipoles can get aligned in the direction of the applied magnetic field. Therefore, field lines get concentrated inside the material and the field inside is enhanced.</p>	(i)	Diamagnetic	1/2		Paramagnetic	1/2	(ii)	Their justification	1/2 + 1/2	1/2 1/2 1/2 1/2	2
(i)	Diamagnetic	1/2										
	Paramagnetic	1/2										
(ii)	Their justification	1/2 + 1/2										
Q10	<table border="1" data-bbox="483 1958 1402 2240"> <tr> <td>Calculation of longest wavelength</td> <td>1 1/2</td> </tr> <tr> <td>Part of electromagnetic spectrum to which this wavelength belongs</td> <td>1/2</td> </tr> </table> $\frac{1}{\lambda} = R_H \left[\frac{1}{n_f^2} - \frac{1}{n_i^2} \right]$ <p>For Balmer series, longest wavelength will be for transition corresponding to $n_i = 3, n_f = 2$</p>	Calculation of longest wavelength	1 1/2	Part of electromagnetic spectrum to which this wavelength belongs	1/2	1/2						
Calculation of longest wavelength	1 1/2											
Part of electromagnetic spectrum to which this wavelength belongs	1/2											

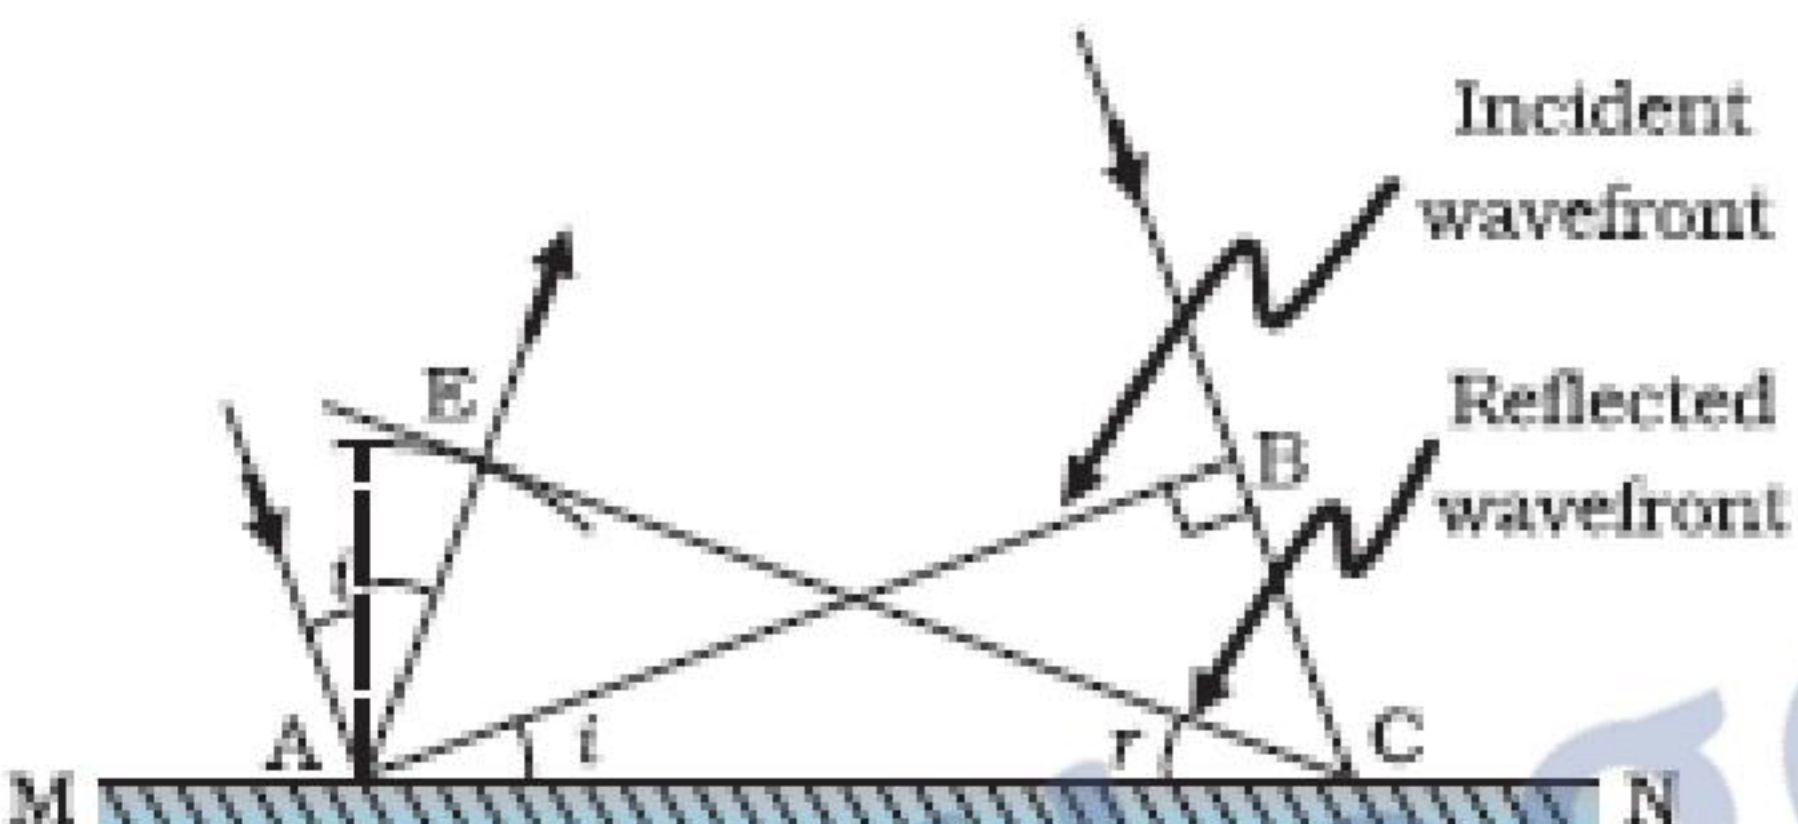	$\frac{1}{\lambda} = 1.1 \times 10^7 \left(\frac{1}{2^2} - \frac{1}{3^2} \right)$ $\lambda = \frac{36 \times 10^{-7}}{5 \times 1.1} \text{ m}$ $= 6.545 \times 10^{-7} \text{ m}$ $= 654 \text{ nm}$	$\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$	<p>Visible Part</p> <p style="text-align: center;">2</p>
SECTION B			
Q11	<div style="border: 1px solid black; padding: 5px;"> <p>Diagram showing incident and reflected wavefront 1</p> <p>Verification of laws of reflection 2</p> </div>  <p>Since time taken by waves from point B to C and from A to E is same</p> $\therefore BC = AE = v\tau$ <p>In $\triangle ABC$ and $\triangle AEC$</p> $AC = AC \quad (\text{common})$ $\angle ABC = \angle AEC \quad (90^\circ \text{ each})$ $AE = BC$ $\therefore \triangle ABC \cong \triangle AEC$ <p>Hence</p> $\angle BAC = \angle ECA$ $\angle i = \angle r$	<p style="text-align: center;">1</p> $\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$	<p style="text-align: center;">3</p>
Q12	<div style="border: 1px solid black; padding: 5px;"> <p>Distinction between sky wave and space wave modes of communication 2</p> <p>Limitation of space wave mode $\frac{1}{2}$</p> <p>Expression for optimum separation $\frac{1}{2}$</p> </div> <p>In sky wave mode of communication waves reach from transmitting antenna to receiving antenna through reflections from ionosphere, while in space wave mode of communications wave travel either directly from transmitter to receiver or through satellite.</p>	<p style="text-align: center;">1+1</p>	





	<p>Direct waves get blocked at some point due to the curvature of earth.</p> <p>Optimum distance between transmitting and receiving antenna.</p> $= \sqrt{2h_T R} + \sqrt{2h_R R}$	<p>1/2</p> <p>1/2</p>	<p>3</p>																							
Q13	<table border="1"> <tr> <td>Drawing of output waveform</td> <td>1</td> </tr> <tr> <td>Identification of Logic gate</td> <td>1</td> </tr> <tr> <td>Truth Table</td> <td>1</td> </tr> </table>  <p style="text-align: center;">NAND GATE</p> <p style="text-align: center;">Truth Table</p> <table border="1"> <thead> <tr> <th colspan="2">Inputs</th> <th rowspan="2">Output</th> </tr> <tr> <th>A</th> <th>B</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1</td> <td>0</td> </tr> <tr> <td>0</td> <td>0</td> <td>1</td> </tr> <tr> <td>1</td> <td>1</td> <td>1</td> </tr> <tr> <td>0</td> <td>0</td> <td>1</td> </tr> </tbody> </table>	Drawing of output waveform	1	Identification of Logic gate	1	Truth Table	1	Inputs		Output	A	B	1	1	0	0	0	1	1	1	1	0	0	1	<p>1</p> <p>1</p> <p>1</p>	<p>3</p>
Drawing of output waveform	1																									
Identification of Logic gate	1																									
Truth Table	1																									
Inputs		Output																								
A	B																									
1	1	0																								
0	0	1																								
1	1	1																								
0	0	1																								
Q14	<table border="1"> <tr> <td>Derivation of current density</td> <td>2</td> </tr> <tr> <td>Explanation with reason the change in mobility of electrons</td> <td>1</td> </tr> </table> <p>Using Ohm's law</p> $V = IR = \frac{I\rho l}{A}$ <p>Potential difference (V), across the ends of a conductor of length 'l', where field 'E' is applied, is given by</p> $V = El$ $\therefore El = \frac{I\rho l}{A}$ <p>But current density $J = \frac{I}{A}$</p>	Derivation of current density	2	Explanation with reason the change in mobility of electrons	1	<p>1/2</p> <p>1/2</p>																				
Derivation of current density	2																									
Explanation with reason the change in mobility of electrons	1																									

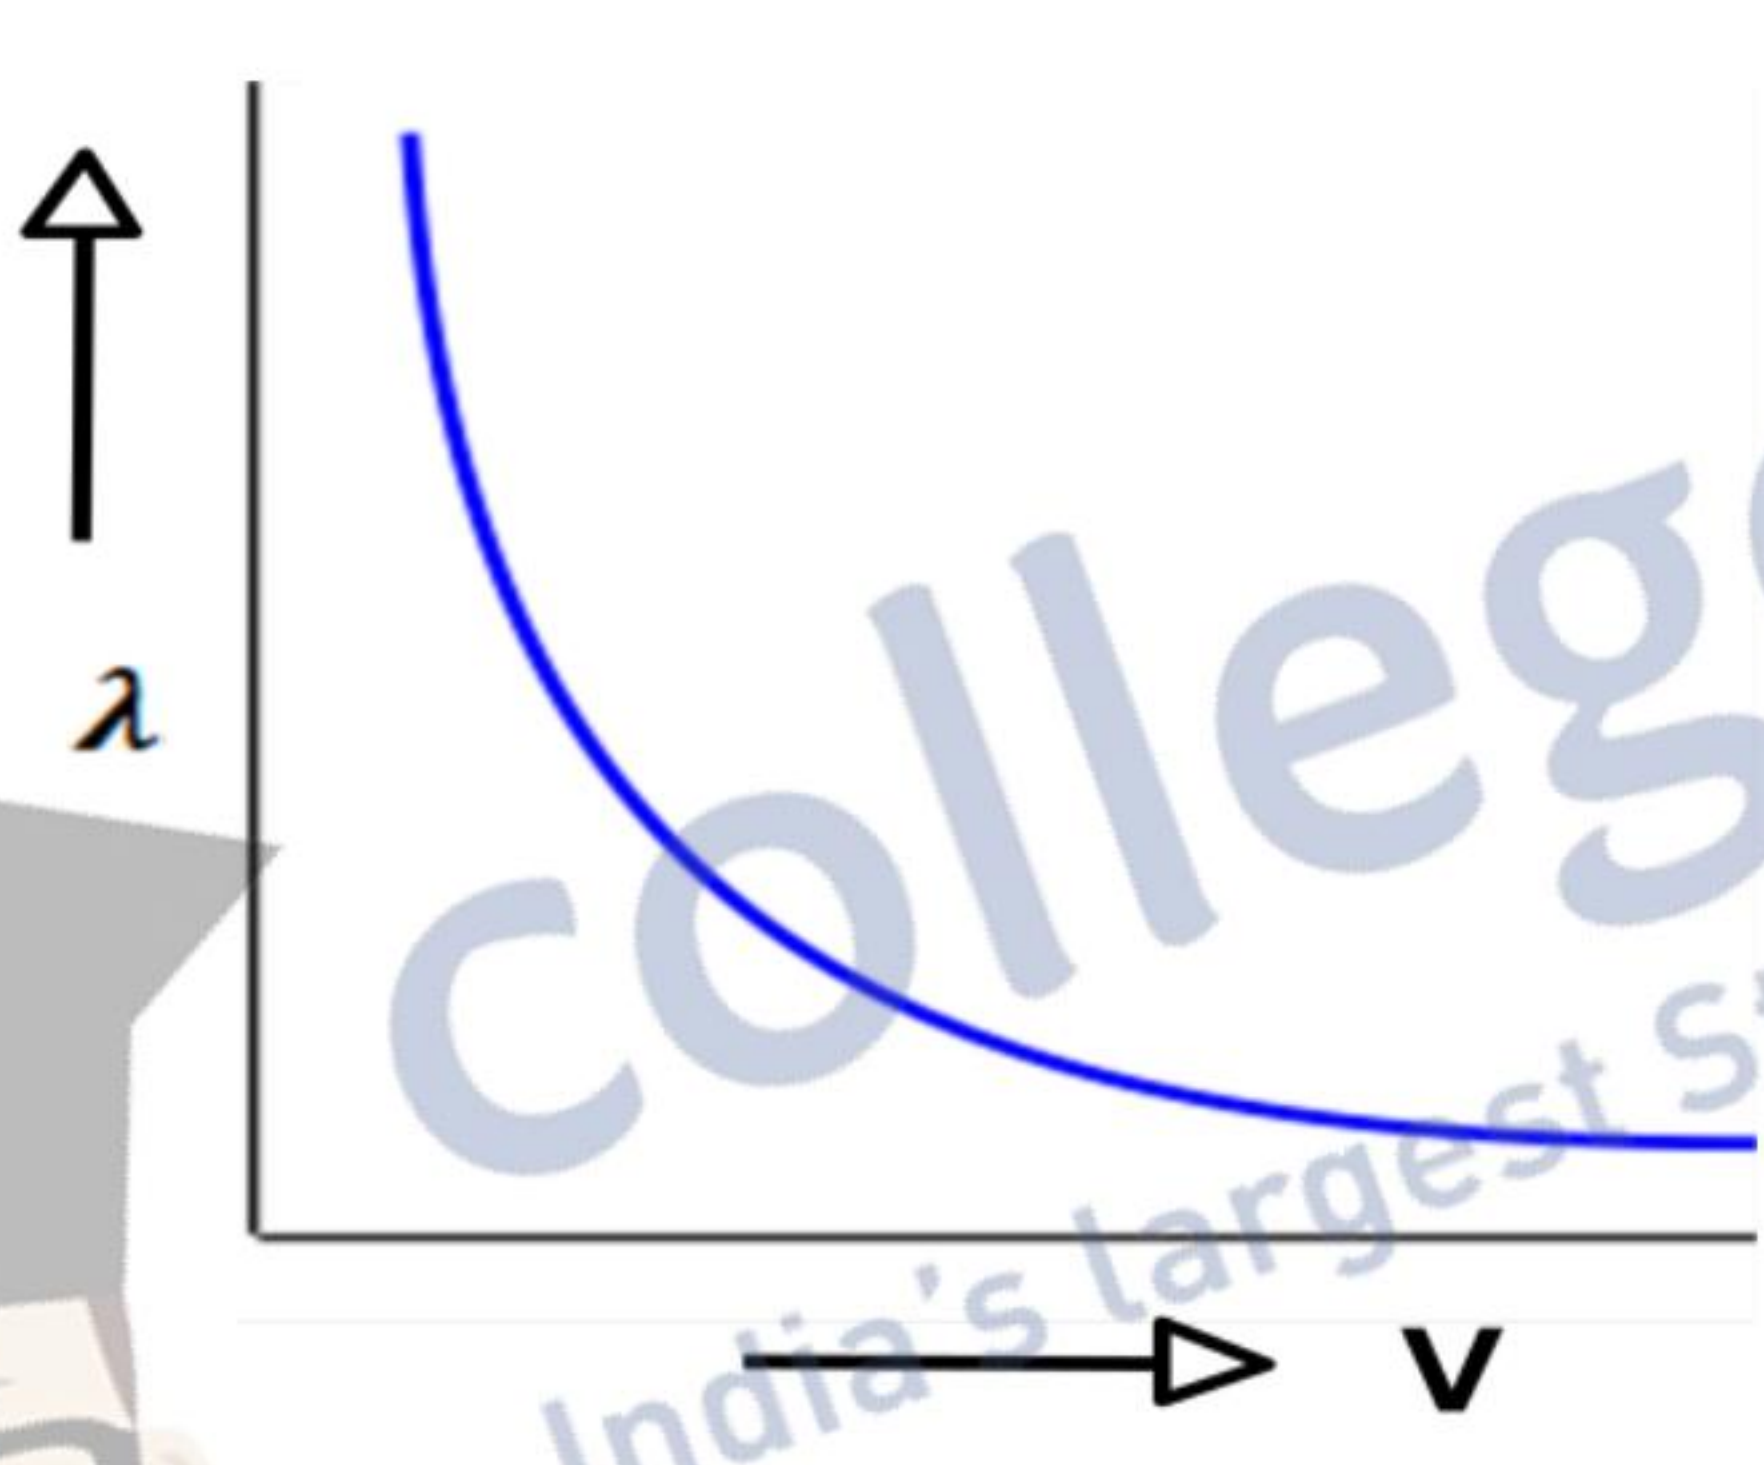

	$El = J\rho l = \frac{Jl}{\sigma}$ $\Rightarrow J = \sigma E$ <p>No change</p> <p>mobility $\mu = \frac{v_d}{E}$ and $v_d = \frac{eV\tau}{ml}$</p> <p>As potential is doubled, drift velocity also gets doubled, therefore, no change in mobility.</p>	1/2	
Q15	<div style="border: 1px solid black; padding: 5px;"> <p>Drawing of graph showing the variation of λ and V 1</p> <p>Explanation of, which particle has more kinetic energy 2</p> </div>  <p>de Broglie wavelength, $\lambda = \frac{h}{\sqrt{2mqV}}$ and $KE = K = qV$</p> $\therefore \lambda = \frac{h}{\sqrt{2mK}}$ <p>Since α particle and proton have same de Broglie wavelength 1 \AA</p> $\therefore \sqrt{2m_p(K)_p} = \sqrt{2m_\alpha(K)_\alpha}$ $\Rightarrow m_p(K)_p = m_\alpha(K)_\alpha$ <p>as $m_\alpha > m_p$</p> $\Rightarrow KE_p > KE_\alpha$ <p>Proton has more Kinetic energy</p>	1/2	3

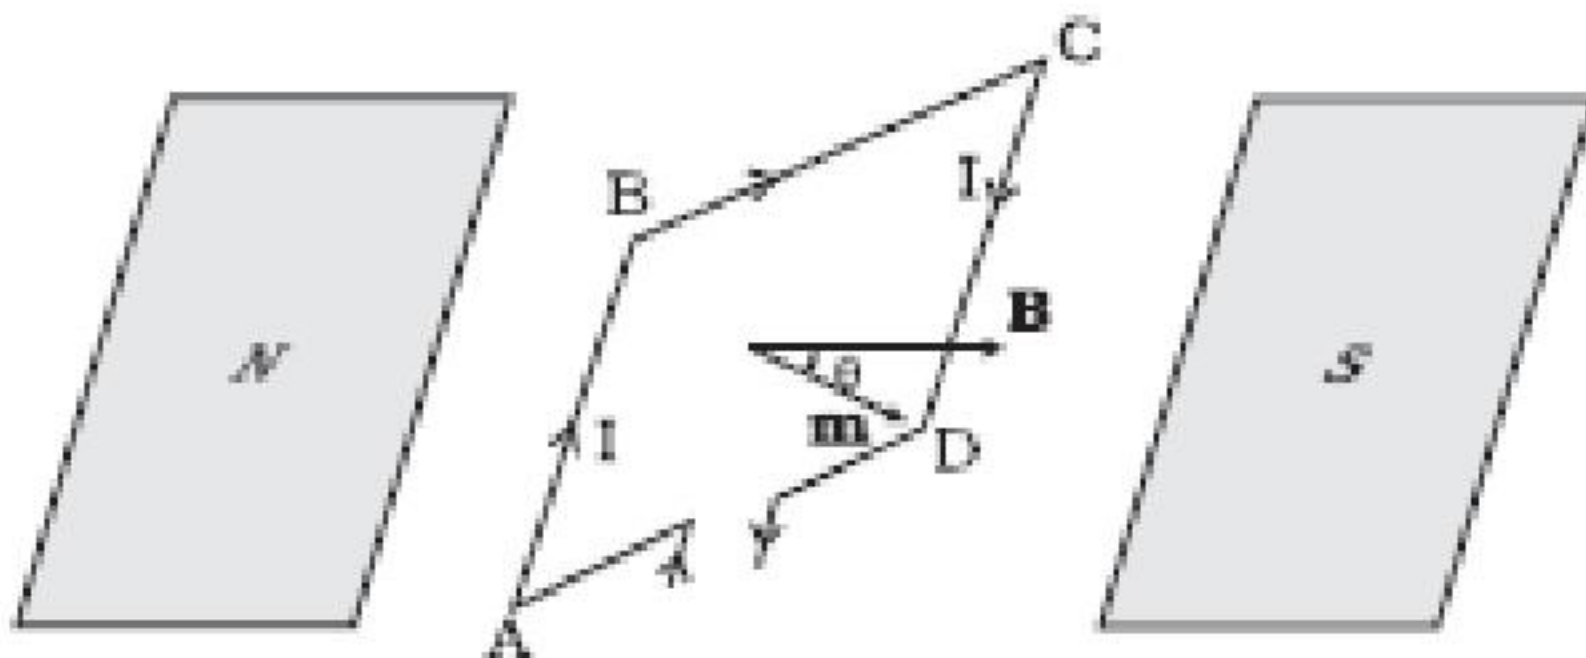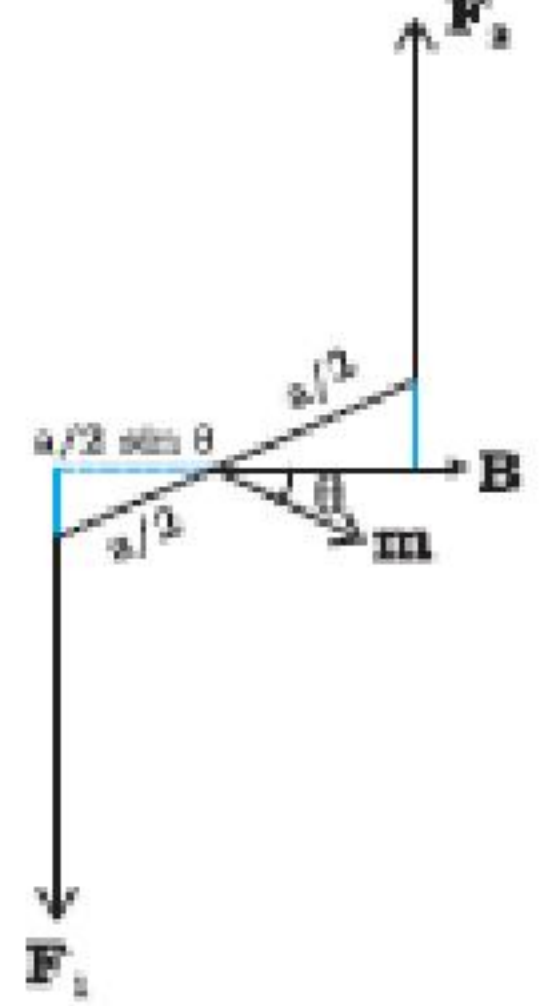

<p>Q16</p>	<table border="1" style="width: 100%;"> <tr> <td>Function of Repeater and receiver</td> <td style="text-align: right;">1/2 + 1/2</td> </tr> <tr> <td>Calculation of modulation index</td> <td style="text-align: right;">2</td> </tr> </table> <p>Repeater: Enhances / extends the range of communication</p> <p>Receiver: Extracts the desired message signals from the received signals</p> $a_c + a_m = 15V$ $a_c - a_m = 3V$ $\Rightarrow a_c = 9V$ $a_m = 6V$ <p>Modulation index $\mu = \frac{a_m}{a_c} = \frac{6}{9} = \frac{2}{3}$</p>	Function of Repeater and receiver	1/2 + 1/2	Calculation of modulation index	2	<p>1/2</p> <p>1/2</p> <p>1/2</p> <p>1/2</p> <p>1/2</p> <p>1/2</p>	<p>3</p>
Function of Repeater and receiver	1/2 + 1/2						
Calculation of modulation index	2						
<p>Q17</p>	<table border="1" style="width: 100%;"> <tr> <td>Definition of magnetic moment</td> <td style="text-align: right;">1</td> </tr> <tr> <td>Derivation of expression of torque acting on a current loop</td> <td style="text-align: right;">2</td> </tr> </table> <p>Magnetic moment is defined as the product of the current flowing in a loop and its area and it is directed along the area vector as per the right handed screw rule.</p> <p>(Alternatively $\vec{m} = I\vec{A}$)</p> <div style="text-align: center;">  <p>(a)</p>  <p>(b)</p> </div>	Definition of magnetic moment	1	Derivation of expression of torque acting on a current loop	2	<p>1</p> <p>1/2</p>	
Definition of magnetic moment	1						
Derivation of expression of torque acting on a current loop	2						





	<p>The forces on arms AB and CD are \vec{F}_1 and \vec{F}_2 with magnitude IbB and acting in opposite direction along different lines of actions. Hence they produce a torque.</p> $F_1 = F_2 = IbB$ <p>Torque $\tau = F_1 \left(\frac{a}{2} \sin \theta\right) + F_2 \left(\frac{a}{2} \sin \theta\right)$</p> $= IbaB \sin \theta$ $= IAB \sin \theta$ <p>where area $A = ab$</p> $= mB \sin \theta$ <p>In vector form, $\vec{\tau} = \vec{m} \times \vec{B}$</p>	<p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p>	<p>3</p>				
Q18	<table border="1"> <tbody> <tr> <td>Naming of optical instrument</td> <td>1</td> </tr> <tr> <td>Calculation of magnifying Power</td> <td>2</td> </tr> </tbody> </table> <p>Compound microscope</p> <p>Focal Length of objective lens ($f = \frac{1}{p}$)</p> $f_0 = \frac{100}{50} \text{ cm} = 2 \text{ cm}$ <p>Focal Length of eye lens</p> $f_e = \frac{100}{12.5} \text{ cm} = 8 \text{ cm}$ <p>Magnifying Power</p> $m = \frac{L}{f_0} \times \frac{D}{f_e}$ $= \frac{20}{2} \times \frac{25}{8} = 31.25$	Naming of optical instrument	1	Calculation of magnifying Power	2	<p>1</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p>	<p>3</p>
Naming of optical instrument	1						
Calculation of magnifying Power	2						
Q19	<table border="1"> <tbody> <tr> <td>Explanation of two processes</td> <td>1+1</td> </tr> <tr> <td>Definition of barrier potential</td> <td>1</td> </tr> </tbody> </table> <p>Diffusion: It is the process of movement of majority charge carriers from their majority zone (i.e., electrons from $n \rightarrow p$ and holes from $p \rightarrow n$) to the minority zone across the junction on account of different concentration</p>	Explanation of two processes	1+1	Definition of barrier potential	1	<p>1</p>	
Explanation of two processes	1+1						
Definition of barrier potential	1						




	<p>gradient on the two sides of the junction.</p> <p><u>Drift</u>: Process of movement of minority charge carriers (i.e., holes from $n \rightarrow p$ and electrons from $p \rightarrow n$) due to the electric field developed at the junction.</p> <p>Barrier potential: The loss of electrons from the n-region and gain of electrons by p-region causes a difference of potential across the junction, whose polarity is such as to oppose and then stop the further flow of charge carriers. This (stopping) potential is called Barrier potential.</p>	1	
		1	3
Q20	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>a. Two properties 1/2+ 1/2</p> <p>b. Derivation of expression for potential energy 2</p> </div> <p>a. (i) Electric field is in the direction in which potential decreases at the maximum rate 1/2</p> <p>(ii) Magnitude of electric field is given by change in the magnitude of potential per unit displacement normal to a charged conducting surface. 1/2 [Alternatively: award half mark of part 'a' if student writes only $E = -\frac{dV}{dr}$]</p> <p>b. Work done in bringing the charge q_1 to a point against external electric field. 1/2</p> $W_1 = q_1 V(\vec{r}_1)$ <p>Work done in bringing the charge q_2 against the external electric field and the Electric field produced due to charge q_1 1/2</p> $W_2 = q_2 V(\vec{r}_2) + \frac{1}{4\pi\epsilon_0} \cdot \frac{q_1 q_2}{r_{12}}$ <p>Therefore Total work done = Electrostatic potential energy 1</p> $U = q_1 V(\vec{r}_1) + q_2 V(\vec{r}_2) + \frac{1}{4\pi\epsilon_0} \cdot \frac{q_1 q_2}{r_{12}}$ <p style="text-align: center;">OR</p>		3


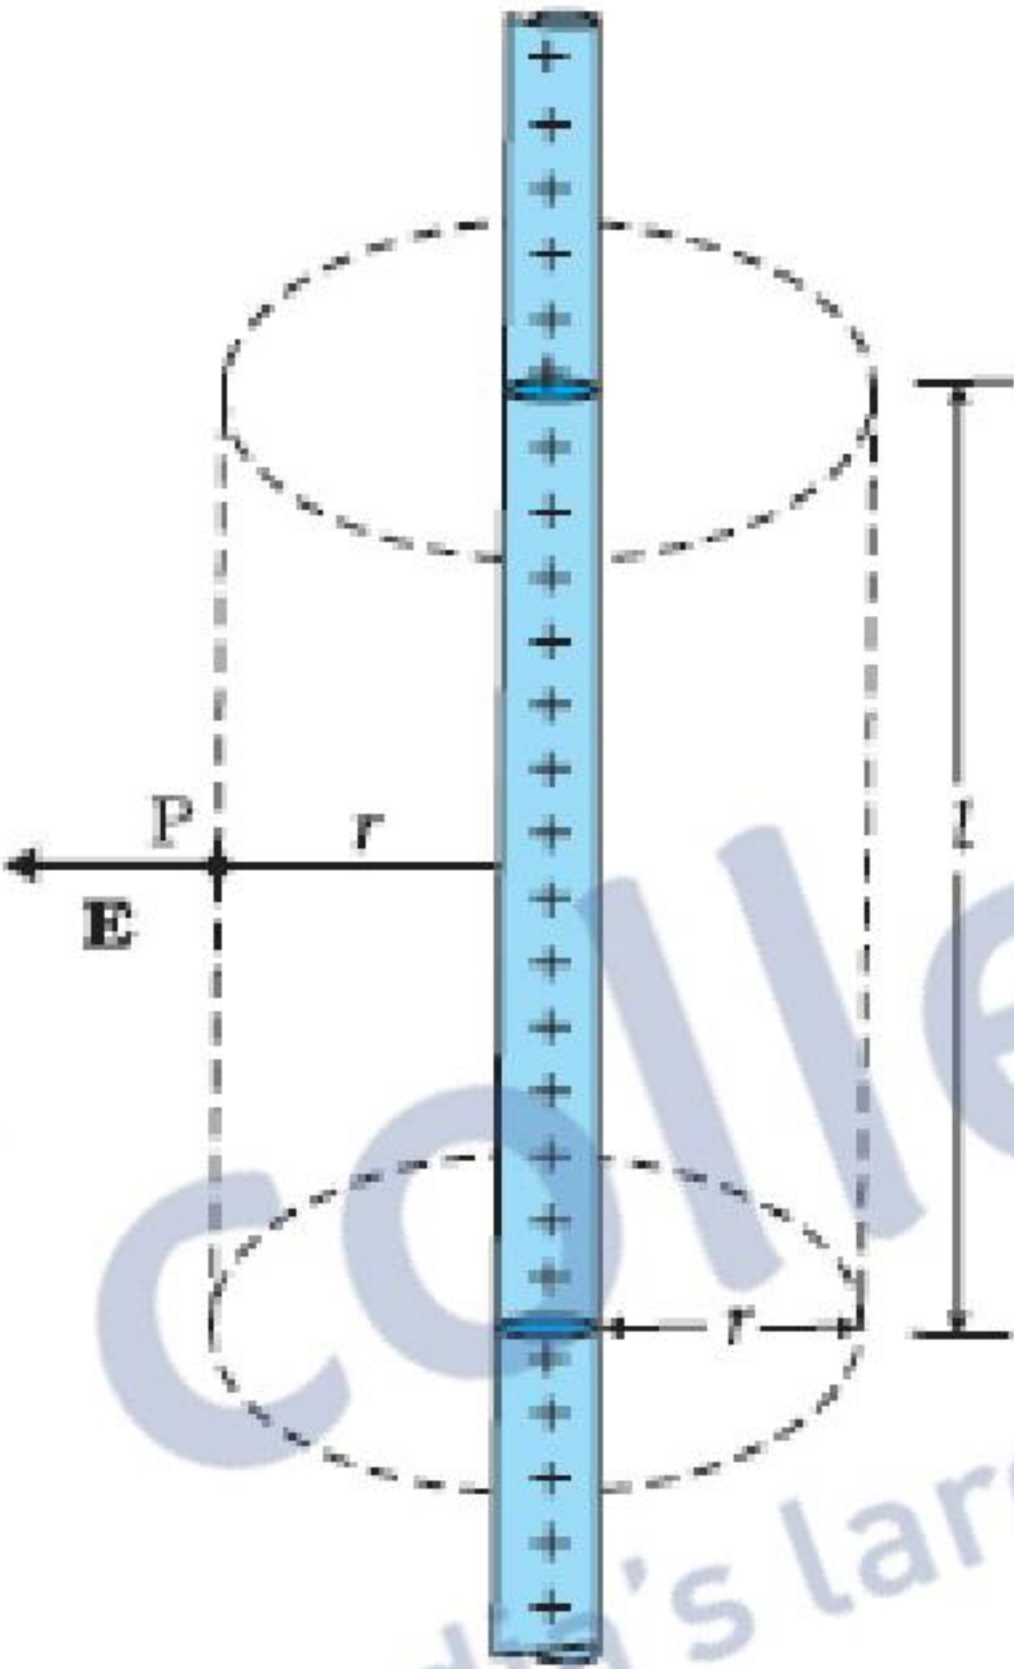



	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>Statement of Gauss's Law 1</p> <p>Derivation of electric field due to an infinitely long straight uniformly charged wire. 2</p> </div> <p>The surface integral of electric field over a closed surface is equal to $\frac{1}{\epsilon_0}$ times the charge enclosed by the surface.</p> <p>Alternatively,</p> $\oint \vec{E} \cdot d\vec{s} = \frac{q}{\epsilon_0}$  <p>Flux through the Gaussian surface = flux through the curved cylindrical part of the surface $= E \times 2\pi r l$ Charge enclosed by the surface = λl $\Rightarrow E \times 2\pi r l = \frac{\lambda l}{\epsilon_0}$ $\Rightarrow E = \frac{\lambda}{2\pi\epsilon_0 r}$</p>	<p>1</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p>	<p>3</p>
<p>Q21</p>	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>Statement of Lenz's Law 1</p> <p>Explanation (with example) 2</p> </div> <p>The Polarity of induced emf is such that it tends to produce a current which opposes the change in magnetic flux that produced it.</p>	<p>1</p>	

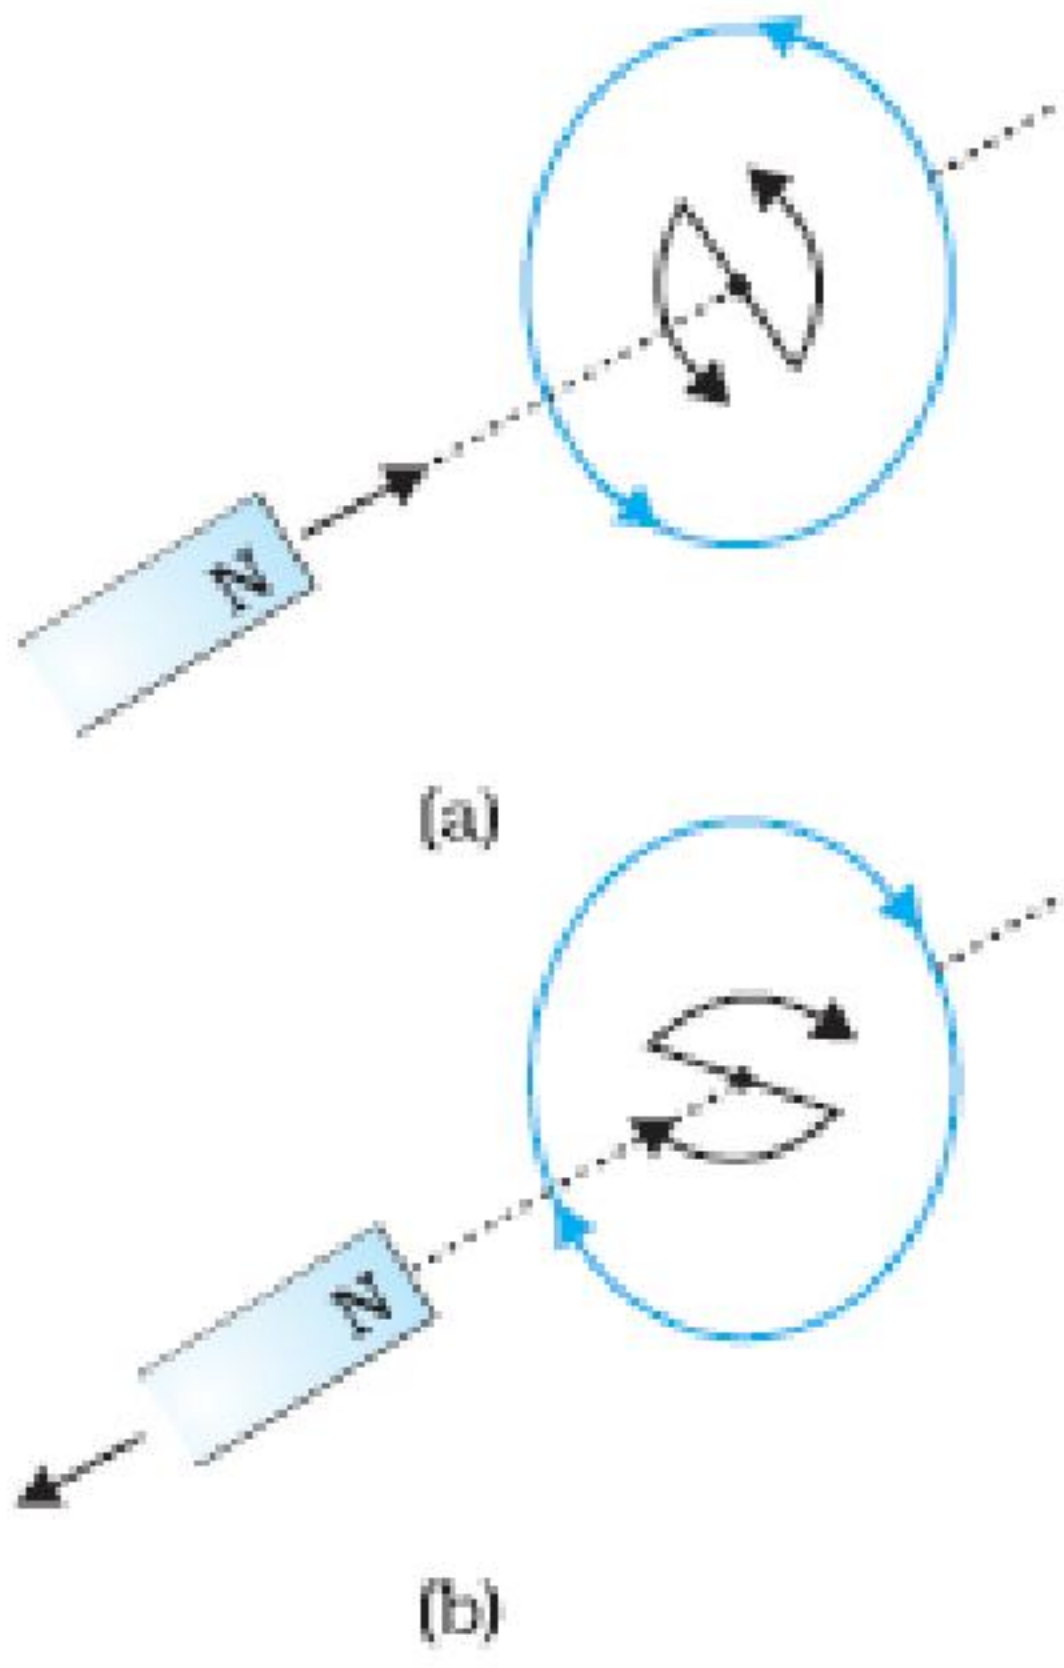	 <p>When the north pole of a bar magnet is pushed towards the close coil, the magnetic flux through coil increases and the current is induced in the coil in such a direction that it opposes the increase in flux. This is possible when the induced current in the coil is in the anticlockwise direction. Just the opposite happens when the north pole is moved away from the coil.</p> <p>In either case, it is the work done against the force of magnetic repulsion/attraction that gets 'converted' into the induced emf.</p>	<p>1/2</p> <p>1/2</p> <p>1/2</p> <p>1/2</p>	<p>3</p>				
<p>Q22</p>	<table border="1" style="width: 100%;"> <tr> <td>Calculation of V and unknown capacitance</td> <td style="text-align: right;">2</td> </tr> <tr> <td>Calculation of charge when voltage is increased by 40 V</td> <td style="text-align: right;">1</td> </tr> </table> <p>Capacitance of capacitor</p> $C = \frac{Q_1}{V_1} = \frac{Q_2}{V_2} = \frac{Q_3}{V_3}$ $\therefore C = \frac{120\mu\text{C}}{V} = \frac{40\mu\text{C}}{(V - 40)}$ $\Rightarrow 3V - 120 = V$ $2V = 120\text{volt}$ $V = 60\text{ volt}$ $\therefore \text{Capacitance, } C = \frac{120\mu\text{C}}{60\text{V}} = 2\mu\text{F}$ <p>Charge stored in the capacitor when voltage is increased by 40 V</p> $Q_3 = 2\mu\text{C} \times (60 + 40)\text{V} = 200\mu\text{C}$	Calculation of V and unknown capacitance	2	Calculation of charge when voltage is increased by 40 V	1	<p>1/2</p> <p>1/2</p> <p>1/2</p> <p>1/2</p> <p>1/2 + 1/2</p>	<p>3</p>
Calculation of V and unknown capacitance	2						
Calculation of charge when voltage is increased by 40 V	1						

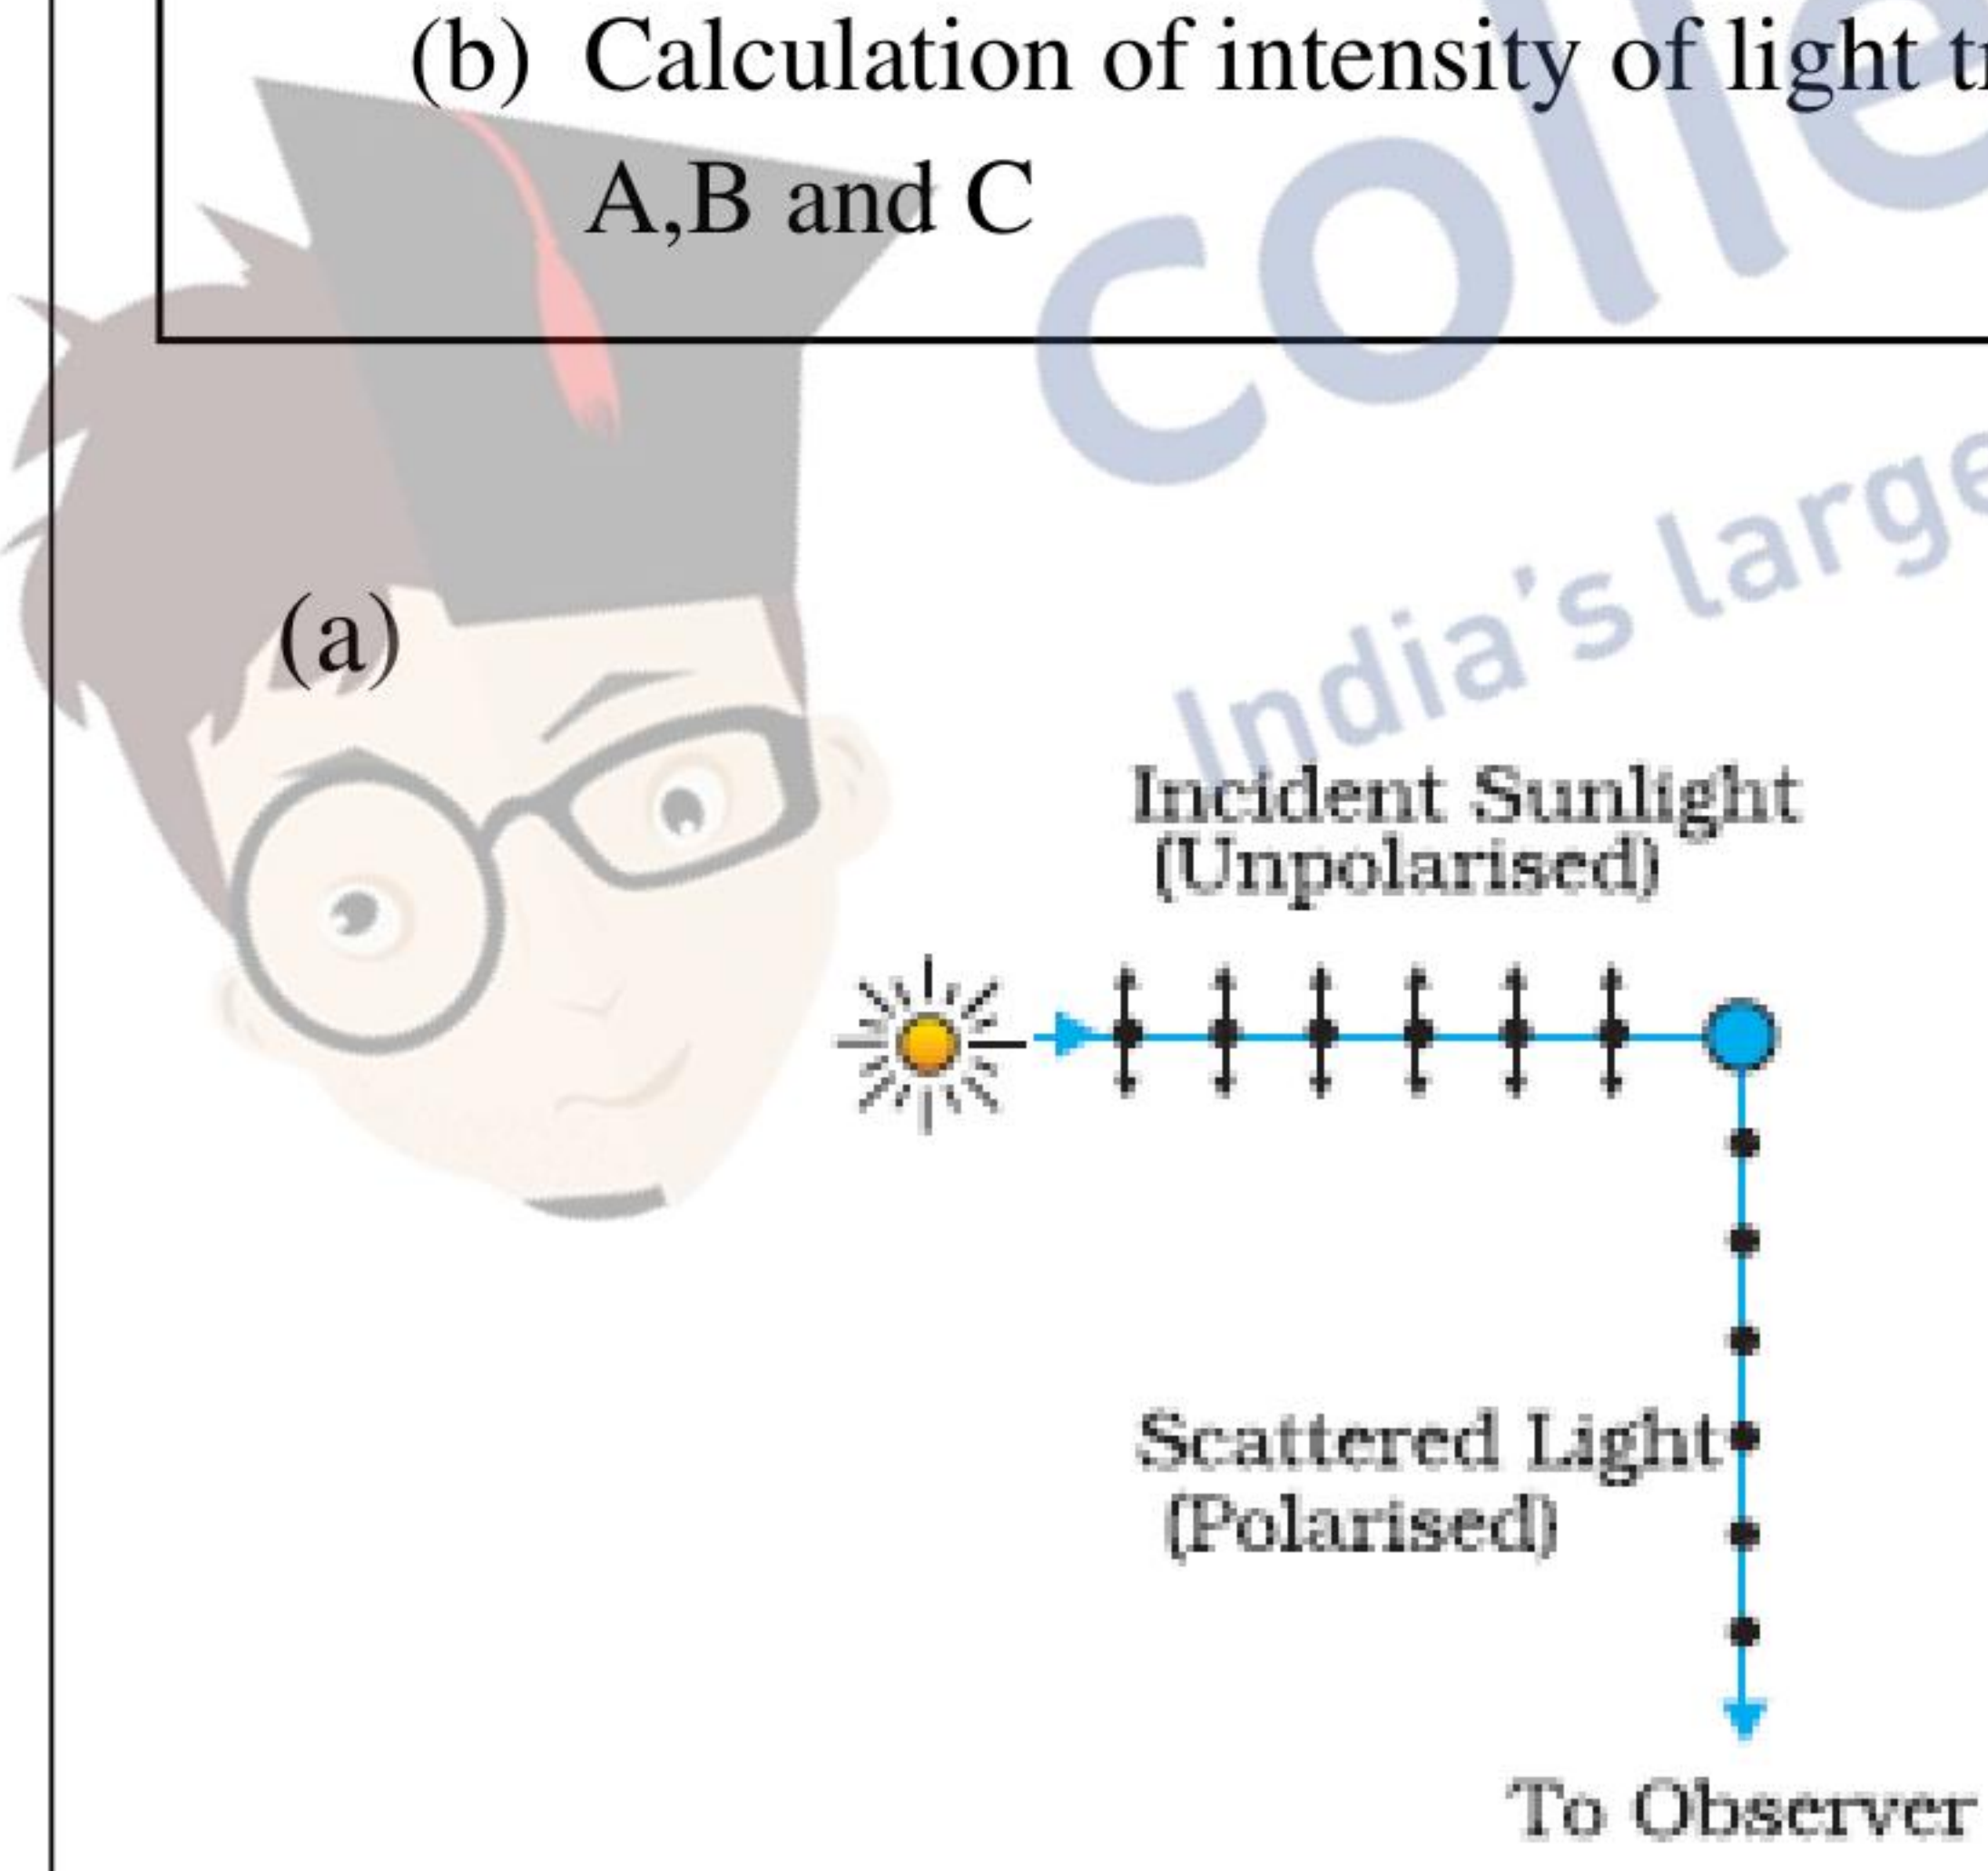

<p>Q23</p>	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>(1) Moral values of Prof. Srivastava 1/2 + 1/2</p> <p>(2) Relation between mean life & half life 1</p> <p>(3) Calculation of half life and initial activity 1+1</p> </div> <p>Care, concern, helping attitude [any two values]</p> <p>Mean life = (half life/0.693)/(1.44 times half life) $(= 1.44 T_{\frac{1}{2}})$</p> <p>Half life = 10 hour (as per given information)</p> $R = R_0 \left(\frac{1}{2}\right)^n \Rightarrow \frac{R_0}{R} = (2)^n$ $\frac{R_0}{10000} = (2)^2$ $\Rightarrow R_0 = 40000 \text{ dps}$	<p>1/2 + 1/2</p> <p>1</p> <p>1/2</p> <p>1/2</p> <p>1/2</p> <p>1/2</p>	<p>4</p>
<p>Q24</p>	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>(a) Explanation, how plane polarized light can be produced by scattering 2</p> <p>(b) Calculation of intensity of light transmitted by A,B and C 3</p> </div> <div style="text-align: center;">  <p>(a)</p> <p>Incident Sunlight (Unpolarised)</p> <p>Scattered Light (Polarised)</p> <p>To Observer</p> </div> <p>Unpolarised light, from sun, has Electric field components perpendicular to plane of figure and in the plane of figure. Under the influence of Electric field of the incident wave the electrons in the molecules acquires components of motion in both these directions. As the observer is looking 90° to the direction of sun, hence charges parallel to the plane of figure do not radiate energy towards the observer since their acceleration has no transverse components. Therefore it gets polarized perpendicular to plane of figure.</p>	<p>1</p> <p>1</p>	

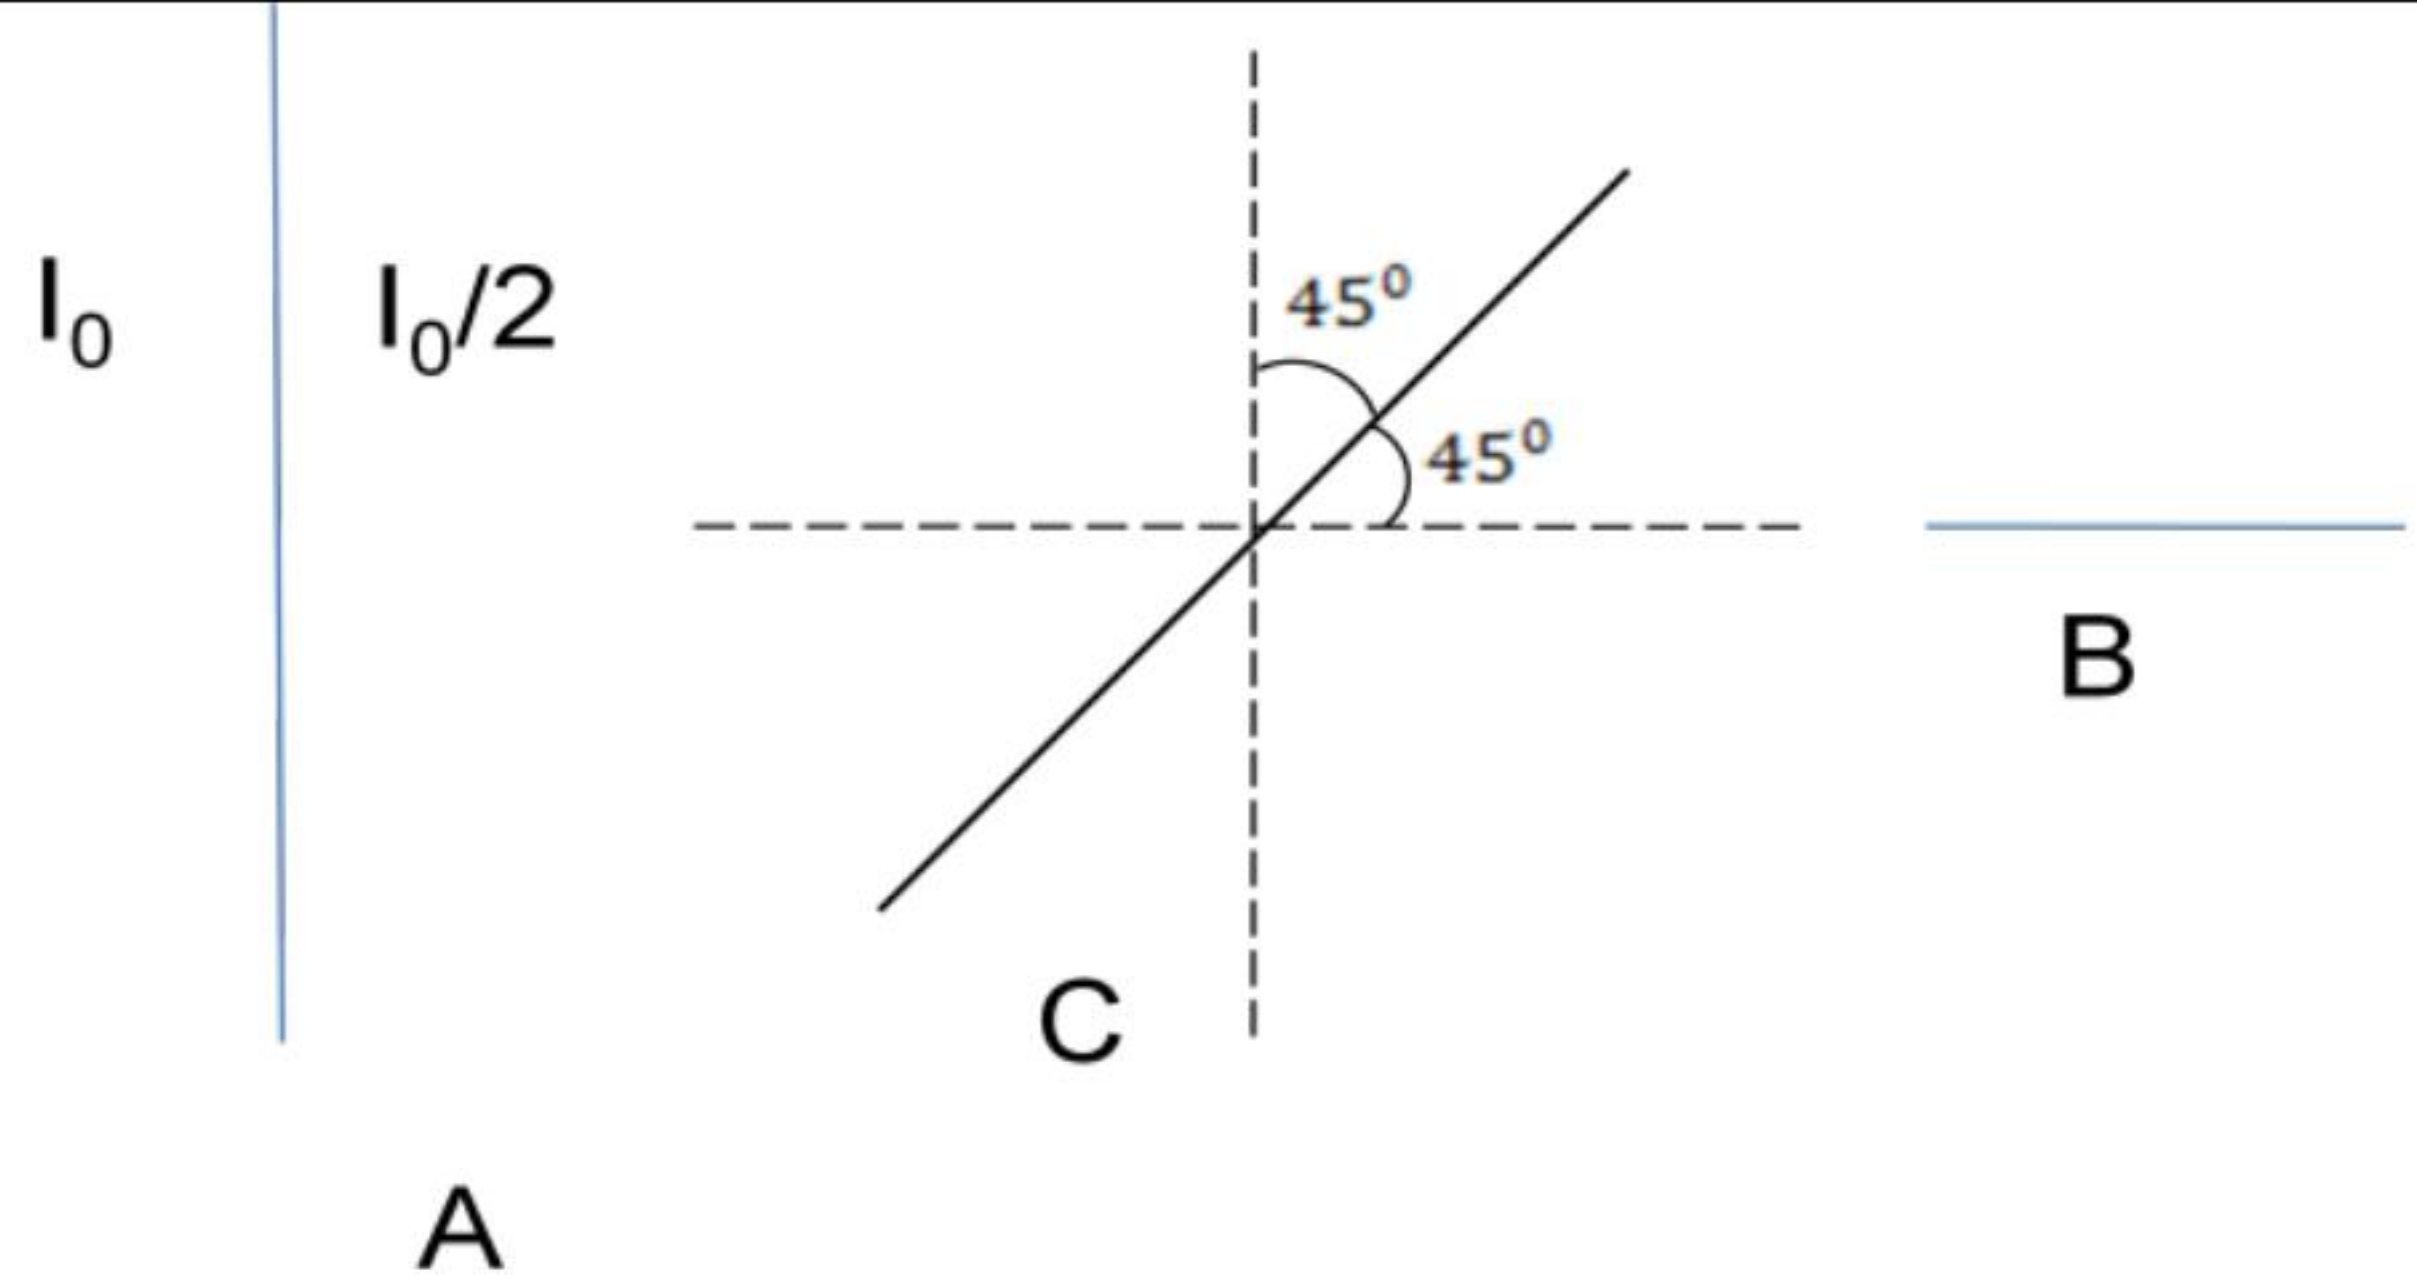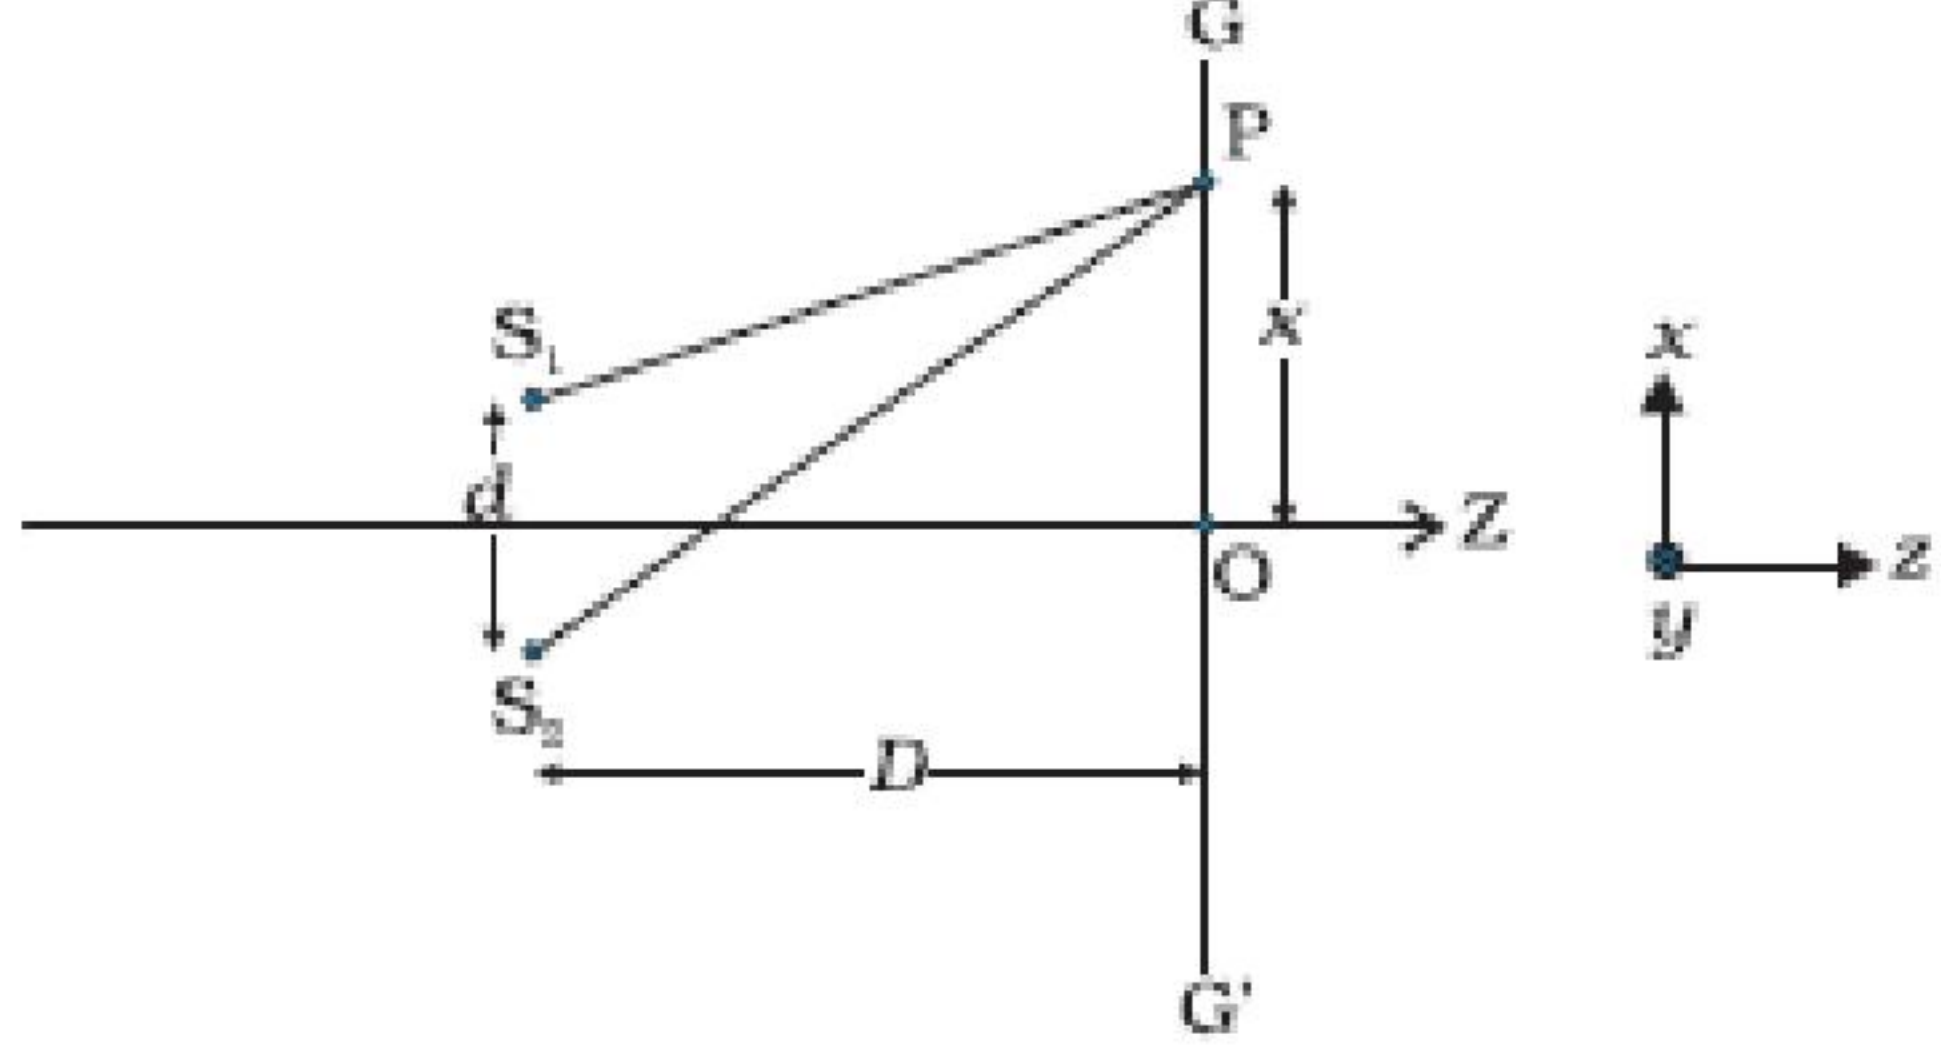
	 <p>Intensity of light transmitted through A = $\frac{I_0}{2}$</p> <p>Transmitted through Polaroid 'C'</p> $I' = \frac{I_0}{2} \cos^2 45^\circ$ $= \frac{I_0}{4}$ <p>Transmitted through Polaroid 'B';</p> $I'' = \frac{I_0}{4} \cos^2 45^\circ$ $= \frac{I_0}{8}$ <p>OR</p> <div style="border: 1px solid black; padding: 5px;"> <p>(a) Explanation of formation of dark and bright fringes 2 1/2</p> <p>(b) (i) Calculation of the distance of third bright fringe 1</p> <p>(ii) Calculation of least distance 1 1/2</p> </div>  <p>At centre of the screen i.e. at point O, waves from two sources S_1 and S_2 meet in same phase and produce constructive interference, and similarly at all those points</p>	<p>1</p> <p>1/2</p> <p>1/2</p> <p>1/2</p> <p>1/2</p> <p>5</p> <p>1/2</p>	
--	--	--	--

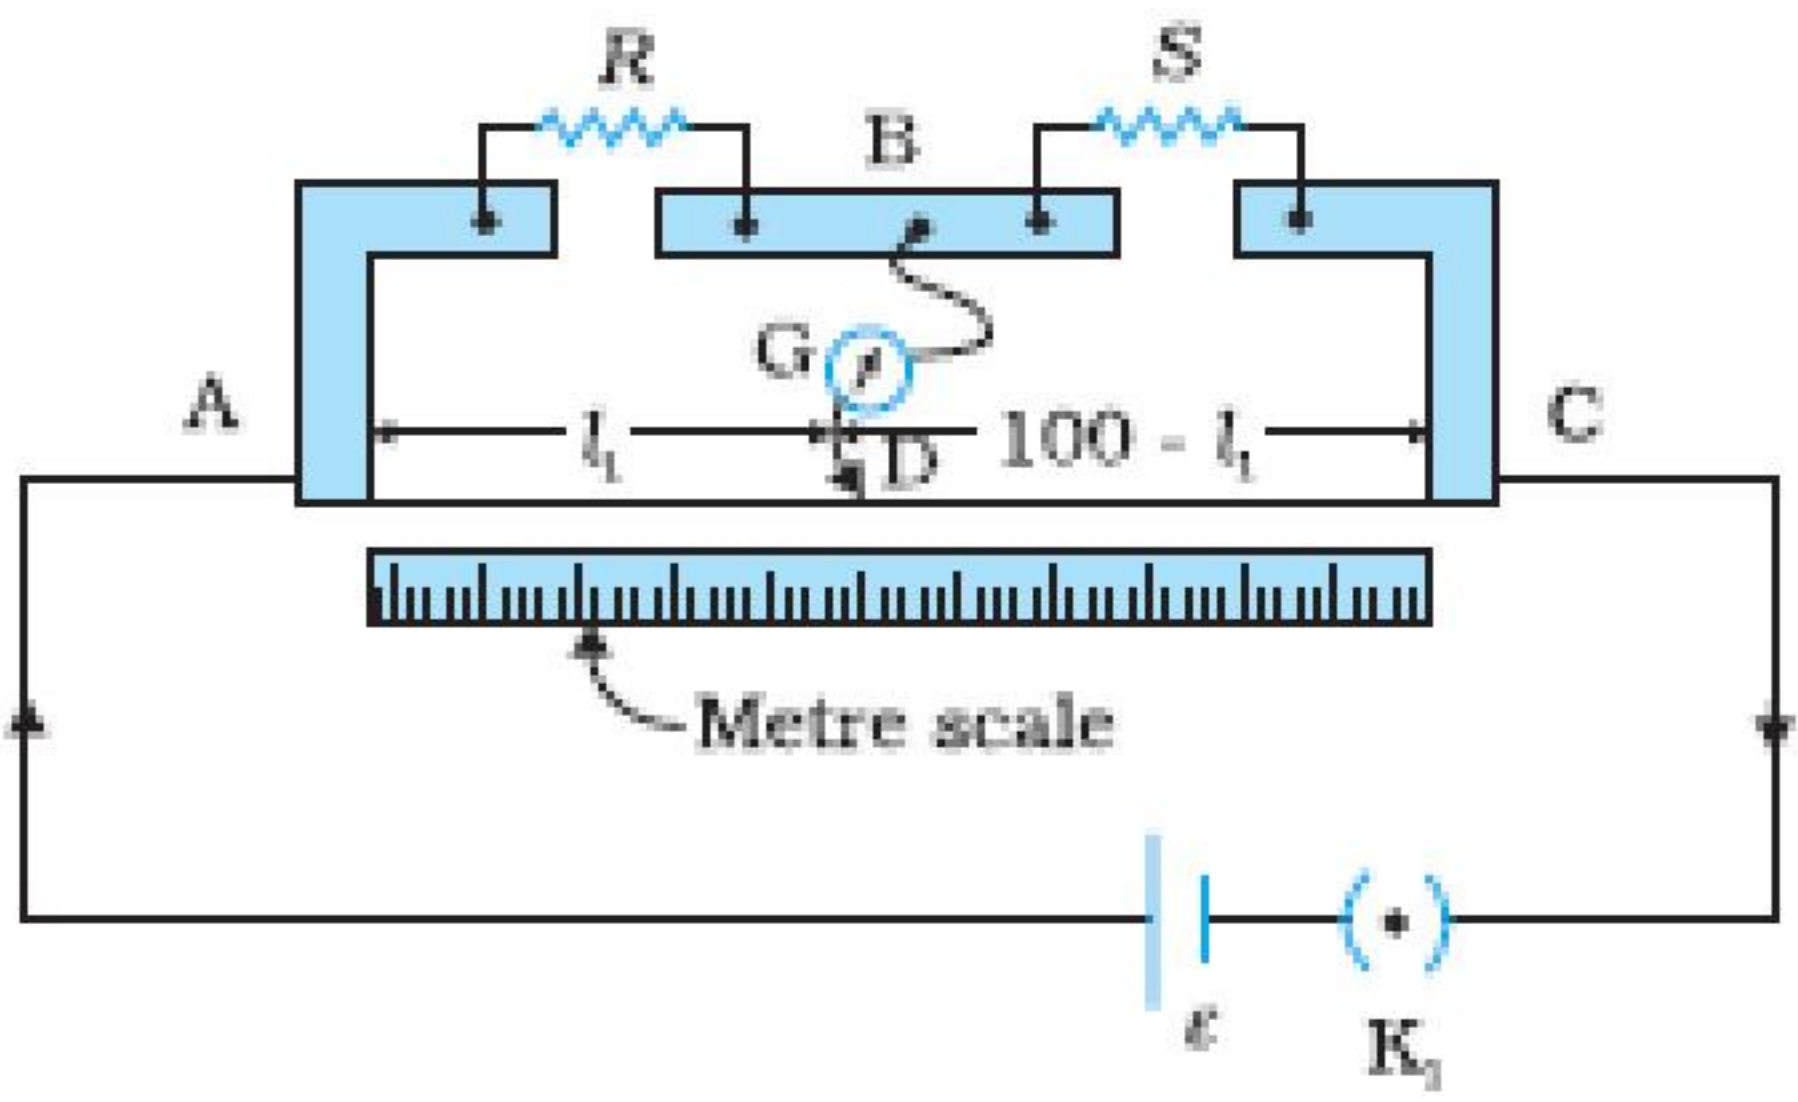	<p>on the screen where waves have path difference $n\lambda$, $n = 0, 1, 2, 3 \dots$, they produce constructive interference hence bright fringes are obtained.</p> <p>At the points on the screen where waves from S_1 and S_2 meet with phase difference of $(2n + 1)\pi$ or path difference of $(2n + 1)\frac{\lambda}{2}$, the waves will produce destructive interference and dark fringes are obtained.</p> <p>(b) (i) $x_n = \frac{n\lambda D}{d}$ $= \frac{3 \times 650 \times 10^{-9} \times 1.2}{4 \times 10^{-3}}$ $= 585 \times 10^{-6} \text{ m}$ $= 0.585 \text{ mm}$</p> <p>(ii) $\frac{n_1 \lambda_1 D}{d} = \frac{n_2 \lambda_2 D}{d}$ $\Rightarrow n_1 \lambda_1 = n_2 \lambda_2$ $\frac{n_1}{n_2} = \frac{\lambda_2}{\lambda_1} = \frac{520}{650} = \frac{4}{5}$ <p>Therefore, 4th bright fringe of $\lambda = 650\text{nm}$ will coincide with 5th bright fringe 520nm. Least distance from central maximum where bright fringes of both wavelength coincide $= \frac{4 \times 650 \times 1.2 \times 10^{-9}}{4 \times 10^{-3}} \text{ m} = 780 \times 10^{-6} \text{ m} = 0.78 \text{ mm}$</p> </p>	<p>1</p> <p>1</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p>	
<p>Q25</p>	<p>(a) Labelled circuit diagram of meter bridge & derivation of expression of R 3</p> <p>(b) Meaning of end error and its correction $\frac{1}{2} + \frac{1}{2}$</p> <p>Effect on balancing Length $\frac{1}{2}$</p> <p>Reason $\frac{1}{2}$</p> <p>(a)</p> 	<p>1</p>	



	$r = R \left(\frac{l_1}{l_2} - 1 \right)$ <p>(b) As the question is incomplete, award 1 mark to all candidates who attempt this part.</p>	1	5
Q26	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>Calculation of</p> <p>(a) Capacitance 1</p> <p>(b) Q-factor of circuit and its importance 2</p> <p>Calculation of average power dissipated 2</p> </div> <p>(a) As power factor is unity, $\therefore X_L = X_C$</p> $\Rightarrow \omega = \frac{1}{\sqrt{LC}}$ $100 = \frac{1}{\sqrt{200 \times 10^{-3} \times C}}$ $10^4 \times 2 \times 10^2 \times 10^{-3} \times C = 1$ $C = \frac{1}{2 \times 10^3} \text{F} = 0.5 \times 10^{-3} \text{F}$ $= 0.5 \text{ mF}$ <p>(b) Quality factor</p> $Q = \frac{1}{R} \sqrt{\frac{L}{C}}$ $= \frac{1}{10} \sqrt{\frac{200 \times 10^{-3}}{0.5 \times 10^{-3}}}$ $= \frac{1}{10} \times 20 = 2$ <p>Significance: It measures the sharpness of resonance.</p> <p>Average Power dissipated</p> $P = V_{rms} I_{rms} \cos \phi$ $= 50 \times \frac{50}{10} \times 1 \text{W}$ $= 250 \text{ watts}$	<p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>1</p> <p>1</p>	5

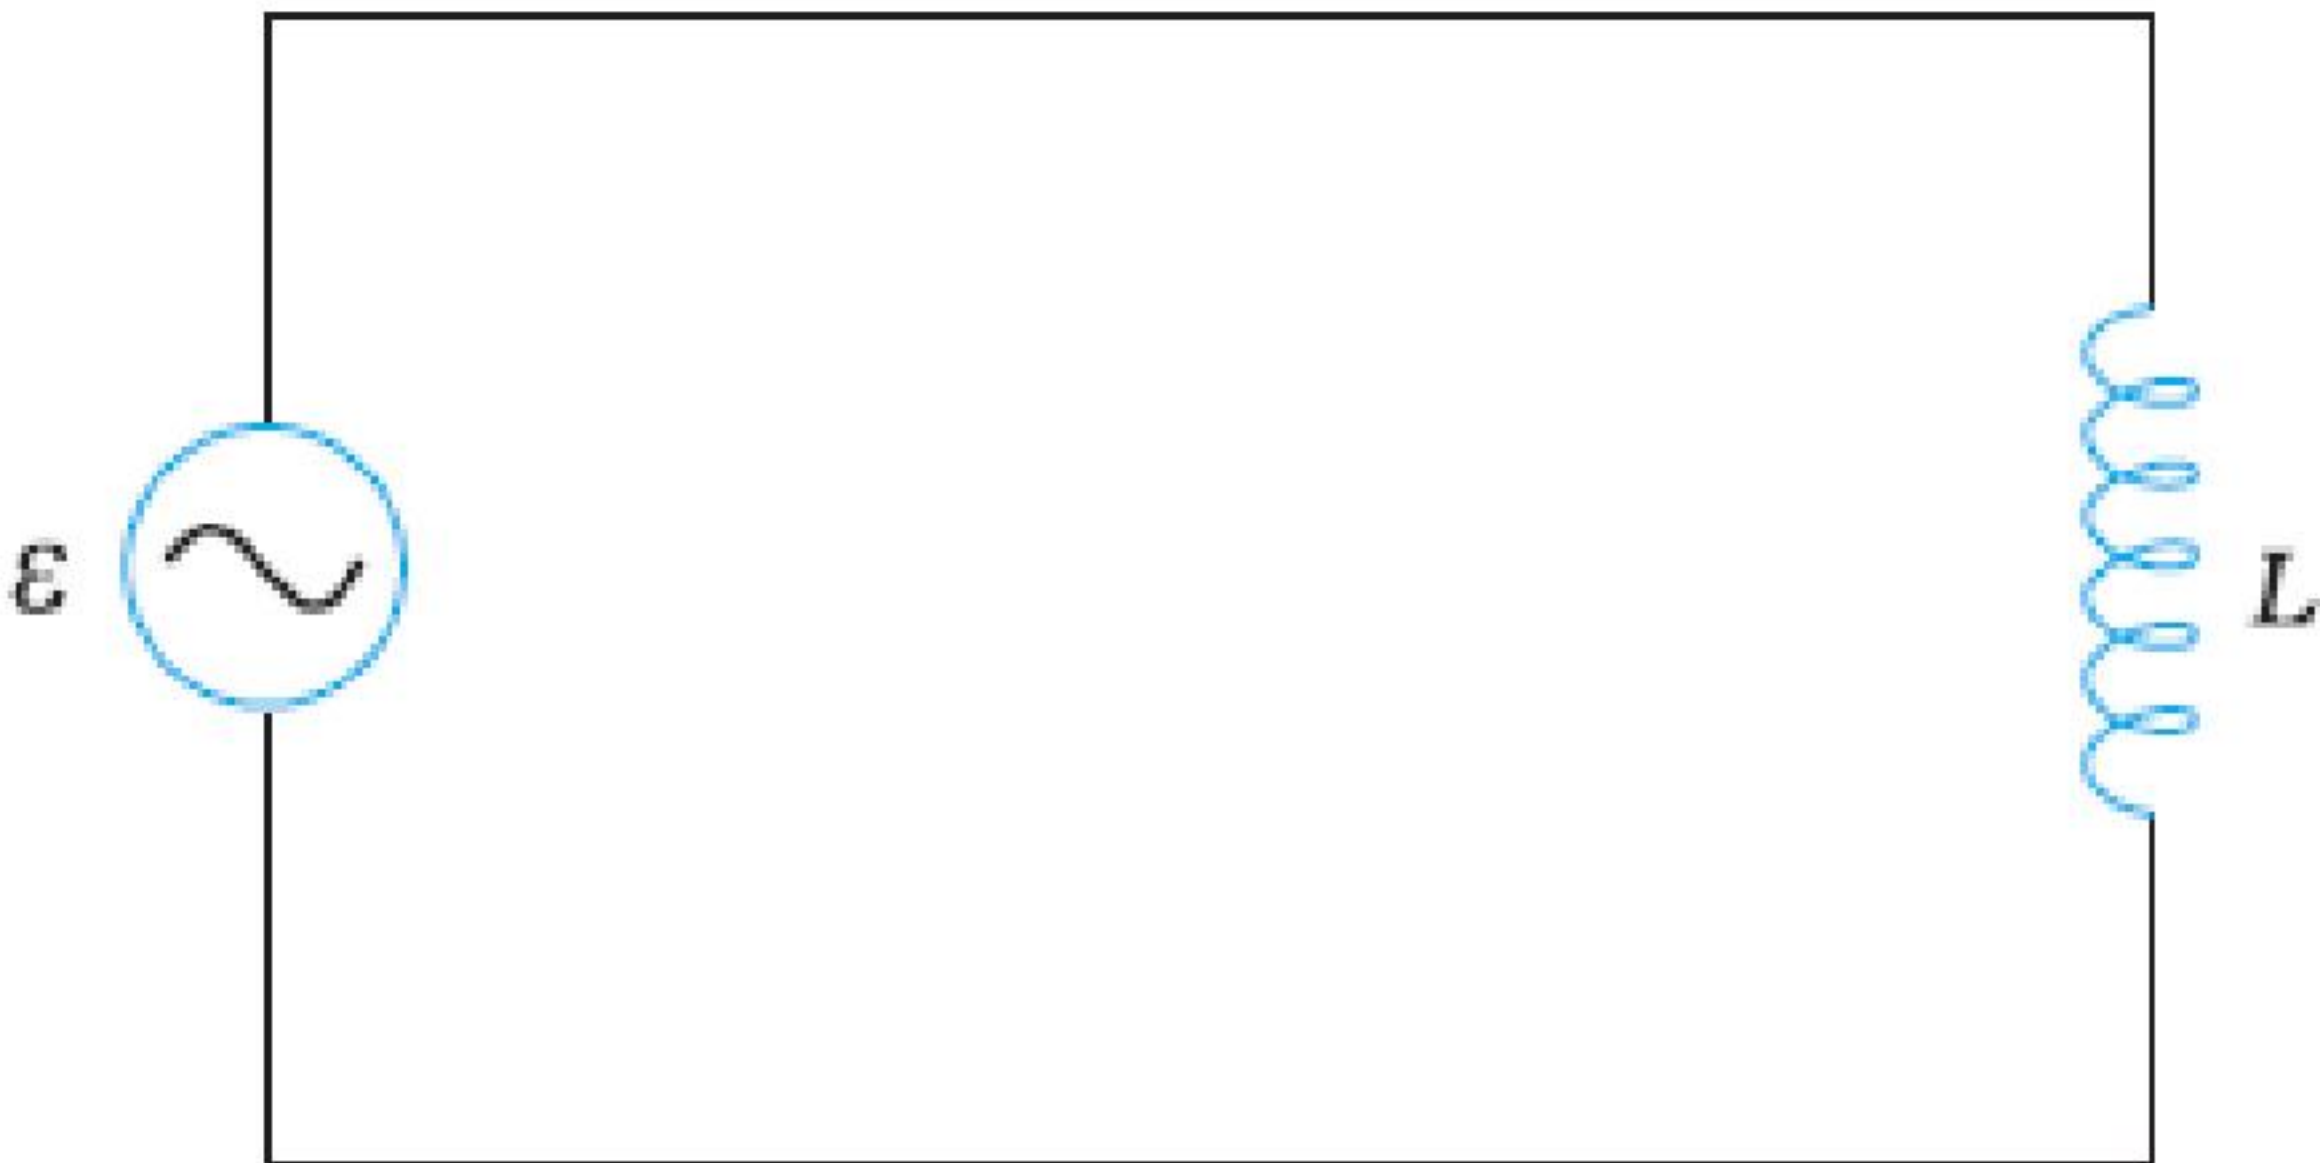

OR			
<p>(a) Showing that of current lags voltage by an angle $\frac{\pi}{2}$ in an ideal inductor 3</p> <p>(b) Calculation of inductance and average power dissipation 2</p>			
<p>(a)</p> 		1/2	
<p>induced emf $e = -L \frac{dI}{dt}$</p> <p>Hence Net voltage in the circuit = $V - L \frac{dI}{dt}$</p> <p>According to Kirchoff's Rule</p> $V - L \frac{dI}{dt} = 0$ $V_m \sin \omega t = L \frac{dI}{dt}$ $dI = \frac{V_m}{L} \sin \omega t dt$ $I = -\frac{V_m}{\omega L} \cos \omega t$ $= \frac{V_m}{\omega L} \sin(\omega t - \frac{\pi}{2})$ <p>$\therefore i = i_m \sin(\omega t - \frac{\pi}{2})$</p> <p>Hence current lags by $\frac{\pi}{2}$</p>		1/2	
<p>(b) Inductance of the inductor = 100mH</p> <p>Average power dissipation</p> $P = V_{rms} I_{rms} \cos \varphi$ $= 10 \times 1 \times \cos \frac{\pi}{4}$		1/2	
$= \frac{10}{\sqrt{2}} W = 5\sqrt{2} \text{watts} (7.07W)$		1	5

